

ORNL/RASA-88/44

M-060

OAK RIDGE NATIONAL LABORATORY

MARTIN MARIETTA

RESULTS OF THE
RADIOLOGICAL SURVEY
AT
2 BRANCA COURT, LODI,
NEW JERSEY (LJ036)

R. D. Foley

L. M. Floyd

R. F. Carrier

J. W. Crutcher

OPERATED BY
MARTIN MARIETTA ENERGY SYSTEMS, INC.
FOR THE UNITED STATES
DEPARTMENT OF ENERGY

This report has been reproduced directly from the best available copy.

Available to DOE and DOE contractors from the Office of Scientific and Technical Information, P.O. Box 62, Oak Ridge, TN 37831; prices available from (615) 576-8401, FTS 626-8401.

Available to the public from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161.

NTIS price codes—Printed Copy: A03 Microfiche A01

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

HEALTH AND SAFETY RESEARCH DIVISION

Nuclear and Chemical Waste Programs (Activity No. AH 10 05 00 0; ONLWCO1)

RESULTS OF THE RADIOLOGICAL SURVEY AT 2 BRANCA COURT, LODI, NEW JERSEY (LJ036)

R. D. Foley, L. M. Floyd, R. F. Carrier, and J. W. Crutcher

Date Published - June 1989

Investigation Team

R. E. Swaja - Measurement Applications and Development Manager
W. D. Cottrell - FUSRAP Project Director
R. W. Doane* - Field Survey Supervisor

Survey Team Members

A. C. Butler*	C. A. Johnson
K. S. Dickerson	C. A. Muhr
B. S. Ellis*	E. M. Pilz
D. S. Foster	W. H. Shinpaugh†
D. W. Greene	W. Winton

*Former Employees of Martin Marietta Energy Systems, Inc. †Stone Associates

Work performed by the MEASUREMENT APPLICATIONS AND DEVELOPMENT GROUP

Prepared by the
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831-6285
operated by
MARTIN MARIETTA ENERGY SYSTEMS, INC.
for the
U. S. DEPARTMENT OF ENERGY
under Contract No. DE-AC05-840R21400

CONTENTS

LIST OF FIGURES	• •	• •	•	• •	•	•	•	•	•	•	٧
LIST OF TABLES	• •		•		•	•	•	•			vi
ACKNOWLEDGMENTS	• • .		•		٠	•	•	•	•	•	ĸi
ABSTRACT	• •				•	•	•	•	•	•	x
INTRODUCTION											
SURVEY METHODS						•		•	•	•	2
SURVEY RESULTS			•			٠	•	•	•		2
Surface Gamma Radiation Levels			•								3
Systematic Soil Samples											
Auger Hole Soil Samples and Gamma Loggin	g		•	• •	•	•	•	•	•	•	3
SIGNIFICANCE OF FINDINGS			•			•	•	•	•		3
DEEEDENCES											

LIST OF FIGURES

1	Court, Lodi, New Jersey (LJ036)	5
2	Diagram showing locations of soil samples taken at 2 Branca Court, Lodi, New Jersey (LJ036)	6
3	Gamma profile for auger hole 1 (LJ036A1) at 2 Branca Court, Lodi, New Jersey	7
4	Gamma profile for auger hole 2 (LJ036A2) at 2 Branca Court, Lodi, New Jersey	8
5	Gamma profile for auger hole 3 (LJ036A3) at 2 Branca Court, Lodi,	g

LIST OF TABLES

3	Concentrations of radionuclides in soil at 2 Branca Court, Lodi, New Jersey (LJ036)					•	11
2	Background radiation levels for the northern New Jersey area	•	•	•	•	•	10
1	Applicable guidelines for protection against radiation	•	•	•	•	•	10

ACKNOWLEDGMENTS

Research for this project was sponsored by the Division of Facility and Site Decommissioning Projects, U.S. Department of Energy, under Contract No. DE-AC05-840R21400 with Martin Marietta Energy Systems, Inc. The authors wish to acknowledge the support of J. E. Baublitz, Acting Director, Office of Remedial Action and Waste Technology; J. J. Fiore, Director, Division of Facility and Site Decommissioning Projects; and members of their staffs. The authors also appreciate the contributions of J. L. Rich, S. W. Hawthorne, B. C. Littleton, and L. J. Jeffers of the Publications Division; M. S. Uziel of the Environmental Information Systems Group; B. S. Ellis, D. A. Roberts, and T. R. Stewart of the Measurement Applications and Development Group; and W. H. Shinpaugh of Don Stone Associates for participation in the collection, analyses, editing, and reporting of data for this survey.

ABSTRACT

Maywood Chemical Works (MCW) of Maywood, New Jersey, generated process wastes and residues associated with the production and refining of thorium and thorium compounds from monazite ores from 1916 to 1956. MCW supplied rare earth metals and thorium compounds to the Atomic Energy Commission and various other government agencies from the late 1940s to the mid-1950s. Area residents used the sandlike waste from this thorium extraction process mixed with tea and cocoa leaves as mulch in their yards. Some of these contaminated wastes were also eroded from the site into Lodi Brook. At the request of the U.S. Department of Energy (DOE), a group from Oak Ridge National Laboratory conducts investigative radiological surveys of properties in the vicinity of MCW to determine whether a property is contaminated with radioactive residues, principally 232Th, derived from the MCW site. The survey typically includes direct measurement of gamma radiation levels and soil sampling for radionuclide analyses. The survey of this site, 2 Branca Court, Lodi, New Jersey (LJ036), was conducted during 1985 and 1986.

Results of the survey demonstrated radionuclide concentrations in excess of the DOE Formerly Utilized Sites Remedial Action Program criteria. The radionuclide distributions are typical of the type of material originating from the MCW site.

RESULTS OF THE RADIOLOGICAL SURVEY AT 2 BRANCA COURT, LODI, NEW JERSEY (LJ036)*

INTRODUCTION

From 1916 to 1956, process wastes and residues associated with the production and refining of thorium and thorium compounds from monazite ores were generated by the Maywood Chemical Works (MCW), Maywood, New Jersey. During the latter part of this period, MCW supplied rare earth metals and thorium compounds to various government agencies. In the 1940s and 1950s, MCW produced thorium and lithium, under contract, for the Atomic Energy Commission (AEC). These activities ceased in 1956, and, approximately three years later, the 30-acre real estate was purchased by the Stepan Company. The property is located at 100 Hunter Avenue in a highly developed area in Maywood and Rochelle Park, Bergen County, New Jersey.

During the early years of operation, MCW stored wastes and residues in low-lying areas west of the processing facilities. In the early 1930s, these areas were separated from the rest of the property by the construction of New Jersey State Highway 17. The Stepan property, the interim storage facility, and several vicinity properties have been designated for remedial action by the U.S. Department of Energy (DOE).

The waste produced by the thorium extraction process was a sandlike material containing residual amounts of thorium and its decay products, with smaller quantities of uranium and its decay products. During the years 1928 and 1944 to 1946, area residents used these process wastes mixed with tea and cocoa leaves as mulch in their lawns and gardens. In addition, some of the contaminated wastes were apparently eroded from the site into Lodi Brook and carried downstream.

Lodi Brook is a small stream flowing south from Maywood with its headwaters near the Stepan waste storage site. Approximately 150 ft after passing under State Route 17, the stream has been diverted underground through concrete or steel culverts until it merges with the Saddle River in Lodi, New Jersey. Only a small section near Interstate 80 remains uncovered. From the 1940s to the 1970s when the stream was being diverted underground, its course was altered several times. Some of these changes resulted in the movement of contaminated soil to the surface of a few properties, where it is still in evidence. In other instances, the contaminated soil was covered over or mixed with clean fill, leaving no immediate evidence on the surface. Therefore, properties in question may be drilled in search of former stream bed material, even in the absence of surface contamination.

As a result of the Energy and Water Appropriations Act of Fiscal Year 1984, the property discussed in this report and properties in its vicinity contaminated with residues from the former MCW were included as a decontamination research

^{*}The survey was performed by members of the Measurement Applications and Development Group of the Health and Safety Research Division at Oak Ridge National Laboratory under DOE contract DE-AC05-84OR21400.

and development project under the DOE Formerly Utilized Sites Remedial Action Program. As part of this project, DOE is conducting radiological surveys in the microity of the site to identify properties contaminated with residues derived from the MCW. The principal radionuclide of concern is thorium-232. The radiological surveys discussed in this report are part of that effort and were conducted, at the request of DOE, by members of the Measurement Applications and Development Group of the Oak Ridge National Laboratory.

A radiological survey of the private, residential property at 2 Branca Court, Lodi, New Jersey, was conducted during 1985 and 1986. The survey and sampling of the ground surface were carried out on October 21, 1985, and the follow-up subsurface investigation was performed on September 12, 1986.

SURVEY METHODS

The radiological survey of the property included: (1) a gamma scan of the entire property outdoors, (2) collection of surface and subsurface soil samples, and (3) gamma profiles of auger holes. No indoor survey measurements were performed.

Using a portable gamma scintillation meter, ranges of measurements were recorded for areas of the property surface. Systematic soil samples were taken at various locations on the property, irrespective of gamma radiation levels. These survey methods followed the plan outlined in Reference 1.

To define the extent of possible subsurface soil contamination, the auger holes were drilled to depths of approximately 2.4 m. A plastic pipe was placed in each hole, and a NaI scintillation probe was lowered inside the pipe. The probe was encased in a lead shield with a horizontal row of collimating slits on the side. This collimation allows measurement of gamma radiation intensities resulting from contamination within small fractions of the hole depth. Measurements were usually made at 15- or 30-cm intervals. If the gamma readings in the hole were elevated, a soil sample was scraped from the wall of the auger hole at the point showing the highest gamma radiation level. The auger hole loggings were used to select locations where further soil sampling would be useful. A split-spoon sampler was used to collect subsurface samples at known depths. In some auger holes, a combination of split-spoon sampling and side-wall scraping was used to collect samples. A comprehensive description of the survey methods and instrumentation has been presented in another report.²

SURVEY RESULTS

Applicable federal guidelines are summarized in Table 1.3 The normal background radiation levels for the northern New Jersey area are presented in Table 2.4 These data are provided for comparison with survey results presented in this section. All direct measurement results presented in this report are gross readings; background radiation levels have not been subtracted. Similarly, background concentrations have not been subtracted from radionuclide concentrations measured in environmental samples.

Surface Gamma Radiation Levels

Gamma radiation levels measured during a gamma scan of the surface of the property are given in Fig. 1. Gamma exposure rates over the major portion of the property ranged from 6 to 9 μ R/h. The highest gamma levels were from the bricks on the front of the house, ranging from 11 to 13 μ R/h, and also from the brick barbecue in the back yard, which was 9 to 11 μ R/h, with the yard adjacent to it measuring 9 to 10 μ R/h (Fig. 1). The foundation on all sides of the house measured 9 to 12 μ R/h.

Systematic Soil Samples

Systematic soil samples were taken from various locations on the property for radionuclide analyses. Locations of the samples (S) are shown in Fig. 2, with results of laboratory analyses provided in Table 3. Concentrations of radium, thorium, and uranium in the samples ranged from 0.48 to 0.76 pCi/g, 0.47 to 1.5 pCi/g, and 0.55 to 0.86 pCi/g, respectively. All samples were below DOE guidelines (Table 1).

Auger Hole Soil Samples and Gamma Logging

Varying thicknesses of subsurface soil were sampled from depths of 30 to 215 cm in auger holes (A) drilled at three separate locations indicated in Fig. 2. The results of analyses of these samples are given in Table 3. Concentrations of ²²⁶Ra and ²³²Th in soil samples ranged from 0.55 to 5.1 and 0.65 to 28 pCi/g, respectively. Radionuclide concentrations in sample A3C were above DOE criteria (Table 1) for thorium, with a value of 28 pCi/g from 185 to 215 cm.

Gamma logging was performed in each of the three auger holes to characterize and further define the extent of possible contamination. The logging technique used here is not radionuclide specific. However, logging data, in conjunction with soil analyses data, may be used to estimate regions of elevated radionuclide concentrations in auger holes when compared with background levels for the area. Following a comparison of these data, it appears that any shielded scintillator readings of 1000 counts per minute (cpm) or greater generally indicate the presence of elevated concentrations of ²²⁶Ra and/or ²³²Th. Data from the gamma profiles of the logged auger holes are graphically represented in Figs. 3 through 5. All readings in hole 1 were below 1000 cpm, except for the 1214 cpm reading at 1.4 m. Readings in auger hole 2 were elevated from 1.4 to 1.7 m, with a maximum of 1745 cpm at 1.5 m. In hole 3, elevated readings began at a depth of 0.9 m and continued to the bottom of the hole (2.4 m), with a maximum of 5945 cpm at 2.0 m. The areas of highest gamma readings correspond to the greatest concentrations of radionuclides shown in Table 3.

SIGNIFICANCE OF FINDINGS

Measurements taken at 2 Branca Court indicate that the property contained radioactive contamination primarily from the ²³²Th decay chain, with slight con-

tarringtion from ⁷²⁶Ra. These radionuclide distributions are typical of the type of material originating from the processing operations at the MCW site. The concentration and extent of ²³²Th on this property were in excess of the relevant DOE criteria (Table 1). This material was found at sample location A3, shown in Fig. 2. Based on the results of this radiological assessment, it is recommended that this site be considered for inclusion in the DOE remedial action program.

REFERENCES

- 1. W. D. Cottrell, ORNL, to A. J. Whitman, DOE/HQ, correspondence, "Radiological Survey of Private Properties in Lodi, New Jersey" (August 15, 1984).
- 2. T. E. Myrick, B. A. Berven, W. D. Cottrell, W. A. Goldsmith, and F. F. Haywood, Procedures Manual for the ORNL Radiological Survey Activities (RASA) Program, Oak Ridge National Laboratory, ORNL/TM-8600 (April 1987).
- 3. U.S. Department of Energy, Guidelines for Residual Radioactive Material at Formerly Utilized Sites Remedial Action Program and Remote Surplus Facilities Management Program Sites (Rev. 2, March 1987).
- 4. T. E. Myrick, B. A. Berven, and F. F. Haywood, State Background Radiation Levels: Results of Measurements Taken During 1975-1979, Oak Ridge National Laboratory, ORNL/TM-7343 (November 1981).

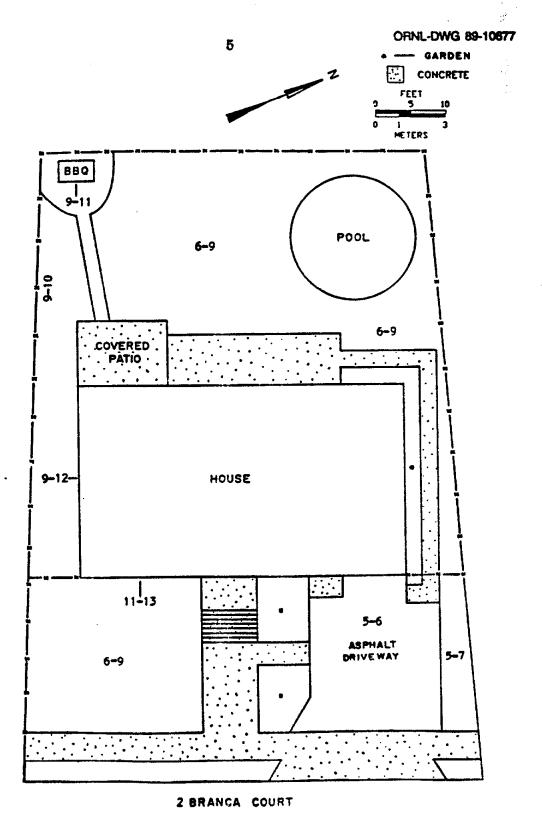


Fig. 1. Gamma radiation levels (μ R/h) measured on the surface at 2 Branca Court, Lodi, New Jersey (LJ036).

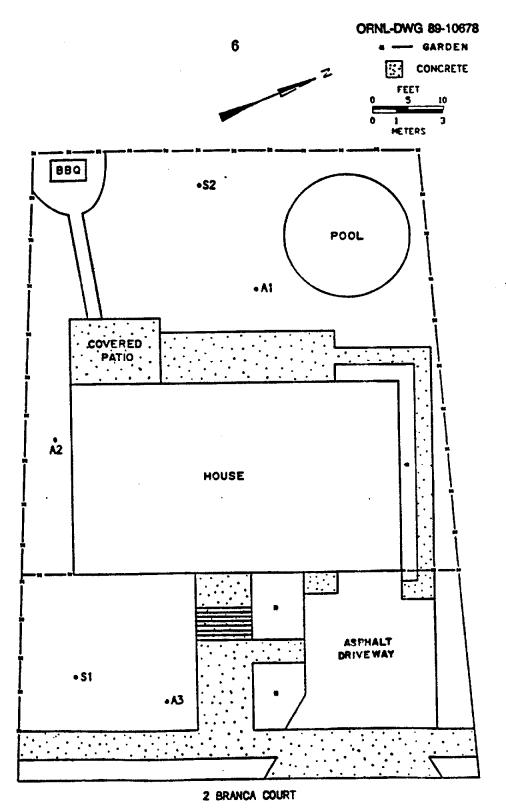


Fig. 2. Diagram showing locations of soil samples taken at 2 Branca Court, Lodi, New Jersey (LJ036).

ORNL-DWG 89-10679

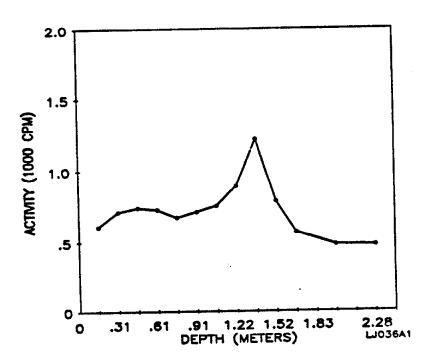


Fig. 3. Gamma profile for auger hole 1 (LJ036A1) at 2 Branca Court, Lodi, New Jersey.

47.0 kg

ORNL-DWG 89-10680


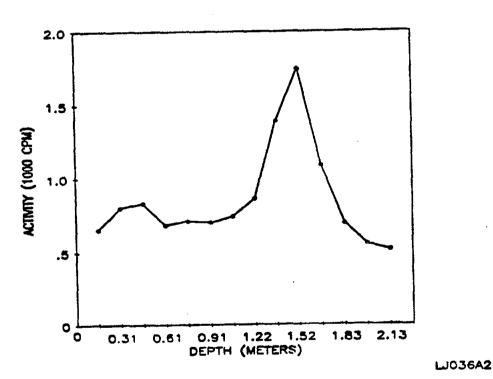


Fig. 4. Gamma profile for auger hole 2 (LJ036A2) at 2 Branca Court, Lodi, New Jersey.



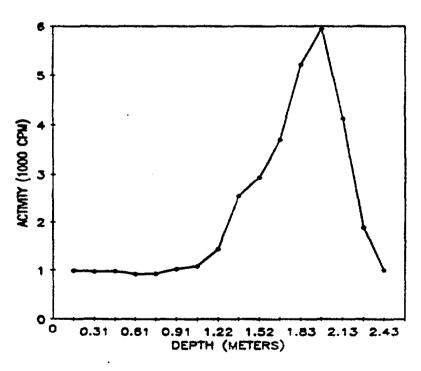

₩03**6A3**

Fig. 5. Gamma profile for auger hole 3 (LJ036A3) at 2 Branca Court, Lodi, New Jersey.

Table 1. Applicable guidelines for protection against radiations

Mode of exposure	Exposure conditions	Guideline value
Radionuclide concentrations in soil	Maximum permissible concentration of the following radionuclides in soil above background levels averaged over 100 m ² area 232Th 230Th 228Ra 226Ra	5 pCi/g averaged over the first 15 cm of soil below the surface; 15 pCi/g when averaged over 15-cm thick soil layers more than 15 cm below the surface

^{*}Reference 3.

Table 2. Background radiation levels for the northern New Jersey area

Type of radiation measurement or sample	Radiation level or radionuclide concentration
Concentration of radionuclides	
in soil (pCi/g) ²³² Th	0.94
2387]	0.9 4
²²⁶ Ra	0.94

^{*}Reference 4.

Table 3. Concentrations of radionuclides in soil at 2 Branca Court, Lodi, New Jersey (LJ036)

	5 4	Radionuc	lide concentration (pC	i/g)
Sample ⁴	Depth (cm)	226Rab	²³² Th ⁵	238Uc
		Systematic sample	gd.	
S1 S2	0–15 0–15	0.76 ± 0.1 0.48 ± 0.06	1.5 ± 0.4 0.47 ± 0.3	0.86 0.55
		Auger samplese		
A1A	30–6 0	0.66 ± 0.1	0.89 ± 0.2	f
A1B	120-150	0.56 ± 0.05	0.83 ± 0.20	f
A1C	150-185	1.4 ± 0.1	3.6 ± 0.3	f
A1D	185-215	0.66 ± 0.04	0.65 ± 0.03	f
A2A	120-150	0.55 ± 0.05	0.81 ± 0.05	f
A2B	150-185	1.8 ± 0.2	7.9 ± 0.9	f
A2C	185-215	1.7 ± 0.03	2.1 ± 0.07	f
A3A	120-150	1.2 ± 0.1	6.0 ± 0.5	f
A3B	150-185	1.8 ± 0.1	8.5 ± 0.5	f
A3C	185-215	5.1 ± 0.5	28 ± 1.8	f

^{*}Locations of soil samples are shown on Fig. 2.

Indicated counting error is at the 95% confidence level $(\pm 2\sigma)$.

Systematic samples are taken at locations irrespective of gamma exposure rates.

Auger samples were not analyzed for ²³⁸U.

^cTotal analytical error of measurement results is less than $\pm 5\%$ (95% confidence level).

Auger samples are taken from holes drilled to further define the depth and extent of radioactive material. Holes are drilled where the surface may or may not be contaminated.

INTERNAL DISTRIBUTION

B. A. Berven
 R. F. Carrier
 W. D. Cottrell
 A. G. Croff
 J. W. Crutcher
 L. M. Floyd
 R. D. Foley

12. S. V. Kaye

13. P. Y. Lu
14. P. T. Owen
15-17. R. E. Swaja
18. J. K. Williams
19. Central Research Library
20. IR&A Publications Office
21. Laboratory Records - RC
22. Y-12 Technical Library

EXTERNAL DISTRIBUTION

- 23. J. D. Berger, Oak Ridge Associated Universities, P.O. Box 117, Oak Ridge, TN 37831
- 24. R. W. Doane, Eberline, Inc., 800 Oak Ridge Turnpike, P.O. Box 350, Oak Ridge, Tn 37831
- 25. J. J. Fiore, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 26-28. G. K. Hovey, Bechtel National, Inc., 800 Oak Ridge Turnpike, P.O. Box 350, Oak Ridge, TN 37831
 - 29. L. R. Levis, Roy F. Weston, Inc., 20030 Century Blvd., Germantown, MD 20874
 - 30. G. P. Turi, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
 - 31. J. W. Wagoner, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 32-34. Andrew Wallo III, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
 - 35. Office of Assistant Manager, Energy Research and Development, Oak Ridge Operations Office, P.O. Box 2001, Oak Ridge, TN 37831-8600
- 36-37. Office of Scientific and Technical Information, DOE, P.O. Box 62, Oak Ridge, TN 37831

Table 3. Concentrations of radionuclides in soil at 2 Branca Court, Lodi, New Jersey (LJ036)

C1-4	Danks	Radionuclide concentration (pCi/g)						
Sample ^e	Depth (cm)	²²⁶ Ra ^b	²³² Th	238 U c				
		Systematic samples	gd .					
S1 S2	0-15 0-15	0.76 ± 0.1 0.48 ± 0.06	1.5 ± 0.4 0.47 ± 0.3	0.86 0.55				
		Auger samples						
A1A	30–60	0.66 ± 0.1	0.89 ± 0.2	f				
A1B	120-150	0.56 ± 0.05	0.83 ± 0.20	f				
A1C	150–185	1.4 ± 0.1	3.6 ± 0.3	f				
A1D	185-215	0.66 ± 0.04	0.65 ± 0.03	f				
A2A	120-150	0.55 ± 0.05	0.81 ± 0.05	f				
A2B	150-185	1.8 ± 0.2	7.9 ± 0.9	f				
A2C	185-215	1.7 ± 0.03	2.1 ± 0.07	f				
A3A	120- 150	1.2 ± 0.1	6.0 ± 0.5	ſ				
A3B	150 –185	1.8 ± 0.1	8.5 ± 0.5	f				
A3C	185-215	5.1 ± 0.5	28 ± 1.8	f				

^{*}Locations of soil samples are shown on Fig. 2.

Indicated counting error is at the 95% confidence level $(\pm 2\sigma)$.

Systematic samples are taken at locations irrespective of gamma exposure

^fAuger samples were not analyzed for ²³⁸U.

Total analytical error of measurement results is less than $\pm 5\%$ (95% confidence level).

^{*}Auger samples are taken from holes drilled to further define the depth and extent of radioactive material. Holes are drilled where the surface may or may not be contaminated.

INTERNAL DISTRIBUTION

1. B. A. Berven

- 2. R. F. Carrier
- 3. W. D. Cottrell
- 4. A. G. Croff
- 5. J. W. Crutcher
- 6. L. M. Floyd
- 7-11. R. D. Foley
 - 12. S. V. Kaye

- 13. P. Y. Lu
- 14. P. T. Owen
- 15-17. R. E. Swaja
 - 18. J. K. Williams
 - 19. Central Research Library
 - 20. IR&A Publications Office
 - 21. Laboratory Records RC
 - 22. Y-12 Technical Library

EXTERNAL DISTRIBUTION

- 23. J. D. Berger, Oak Ridge Associated Universities, P.O. Box 117, Oak Ridge, TN 37831
- 24. R. W. Doane, Eberline, Inc., 800 Oak Ridge Turnpike, P.O. Box 350, Oak Ridge, Tn 37831
- 25. J. J. Fiore, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 26-28. G. K. Hovey, Bechtel National, Inc., 800 Oak Ridge Turnpike, P.O. Box 350, Oak Ridge, TN 37831
 - 29. L. R. Levis, Roy F. Weston, Inc., 20030 Century Blvd., Germantown, MD 20874
 - 30. G. P. Turi, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
 - 31. J. W. Wagoner, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 32-34. Andrew Wallo III, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
 - 35. Office of Assistant Manager, Energy Research and Development, Oak Ridge Operations Office, P.O. Box 2001, Oak Ridge, TN 37831-8600
- 36-37. Office of Scientific and Technical Information, DOE, P.O. Box 62, Oak Ridge, TN 37831