

M-746

Formerly Utilized Sites Remedial Action Program (FUSRAP)

ADMINISTRATIVE RECORD

for the Maywood Site, New Jersey



**US Army Corps
of Engineers®**

081534

Contract No. W-7405-eng-26
Health and Safety Research Division

RESULTS OF THE RADIOLOGICAL SURVEY
AT 460 DAVISON AVENUE, MAYWOOD, NEW JERSEY

September 1981

Work performed
as part of the
REMEDIAL ACTION SURVEY AND
CERTIFICATION ACTIVITIES

OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37830
operated by
UNION CARBIDE CORPORATION
for the
DEPARTMENT OF ENERGY

5
2
6
0
0
0

08 1534

CONTENTS

| | <u>Page</u> |
|--|-------------|
| LIST OF FIGURES | iv |
| LIST OF TABLES | v |
| INTRODUCTION. | 1 |
| SURVEY METHODS. | 2 |
| SURVEY RESULTS. | 2 |
| Outdoor Survey Results | 3 |
| Indoor Survey Results | 4 |
| SUMMARY | 5 |
| REFERENCES | 8 |
| APPENDIX I, Action and Survey Plan, Maywood, New Jersey | 33 |
| APPENDIX II, Gamma Profile Graphs of Core Holes at 460 Davison Avenue in Maywood, New Jersey. | 43 |
| APPENDIX III, Evaluation of Radiation Exposures at 460 Davison Avenue in Maywood, New Jersey. | 49 |

000626

08 153 4

LIST OF FIGURES

| <u>Figure</u> | | <u>Page</u> |
|---------------|---|-------------|
| 1 | Front view of property at 460 Davison Avenue. | 9 |
| 2 | Rear view of property at 460 Davison Avenue | 10 |
| 3 | Grid point and grid block locations at 460 Davison Avenue. | 11 |
| 4 | External gamma-ray measurements (μ R/h) at the ground surface at 460 Davison Avenue | 12 |
| 5 | Location of systematic (MJ) and biased (MJB) soil samples at 460 Davison Avenue | 13 |
| 6 | Location of drill holes at 460 Davison Avenue | 14 |
| 7 | Schematic of the first level floor plan at 460 Davison Avenue showing external gamma-ray measurement results | 15 |
| 8 | Schematic of the second level floor plan at 460 Davison Avenue showing external gamma-ray measurement results | 16 |
| 9 | Schematic of the basement floor plan at 460 Davison Avenue showing external gamma-ray measurement results | 17 |
| 10 | Estimated extent of contaminated areas at 460 Davison Avenue. | 18 |

0 0 0 8 2 7

08 1534

LIST OF TABLES

| <u>Table</u> | | <u>Page</u> |
|--------------|---|-------------|
| 1 | A summary of applicable radiation guidelines | 19 |
| 2 | Background levels for the northern New Jersey area | 20 |
| 3 | Outdoor measurements at 460 Davison Avenue | 21 |
| 4 | Results of radionuclide analyses of surface soil samples from 460 Davison Avenue | 24 |
| 5 | Results of radionuclide analyses of subsurface soil samples from 460 Davison Avenue | 25 |
| 6 | Summary of gamma logging of auger holes at 460 Davison Avenue | 26 |
| 7 | Indoor measurements at 460 Davison Avenue. | 27 |
| 8 | Radon and radon daughter measurements at 460 Davison Avenue | 28 |
| 9 | Summary of outdoor measurements and sample results at 460 Davison Avenue. | 29 |
| 10 | Summary of indoor measurements and sample results at 460 Davison Avenue. | 30 |
| 11 | Summary of measurement results in contaminated areas at 460 Davison Avenue. | 31 |

000628

08 153 4

RESULTS OF THE RADIOLOGICAL SURVEY
AT 460 DAVISON AVENUE, MAYWOOD, NEW JERSEY*

INTRODUCTION

A comprehensive radiological survey of 460 Davison Avenue, Maywood, New Jersey, was conducted by Oak Ridge National Laboratory (ORNL) from June 3 to 10, 1981, with assistance from Oak Ridge Associated Universities (ORAU). Contaminated material was discovered in the area during an EG&G aerial radiological survey,¹ and confirmed by a ground-level radiological survey by the Nuclear Regulatory Commission.² This contaminated material is believed to have originated from the former Maywood Chemical Company (now the Stepan Chemical Company).

The Maywood Chemical Company was founded in 1895. From about 1916 until 1957, the Maywood Chemical Company processed thorium for use in the manufacture of gas mantles for various lighting devices.¹ In 1932, Route 17 was built to the west of the main plant through an area that was used for disposal of process wastes. Although access to the site was probably restricted, the waste disposal area had no access restrictions. In 1959, Maywood Chemical Company was purchased by the Stepan Chemical Company.

Following an aerial survey of the Stepan Chemical Company and the surrounding area in Maywood, New Jersey, by EG&G¹ on January 26, 1981, anomalously high gamma-ray exposure rates (principally ²³²Th daughter radionuclides) were observed in a residential area close to the Stepan Chemical site. Seven private homes in Maywood, New Jersey, were later identified in a follow-up ground survey by the Nuclear Regulatory Commission² (NRC) as having external gamma radiation levels significantly above background. Gamma-ray exposure rates up to 3 mR/h were observed on these properties during NRC surveys.

Additional historical information about the seven private properties was obtained from John Tripuka, owner of the property at 461 Latham Street. Mr. Tripuka related that his father moved into 461 Latham in

*The survey was performed by members of the Off-Site Pollutant Measurements Group of the Health and Safety Research Division at Oak Ridge National Laboratory, under DOE contract W-7405-eng-26.

000829

1928, the same year the house was built. The father was employed at the Maywood Chemical Plant. The plant at that time allowed removal of processing waste by-products from their operations, charging only a minimal fee for transportation. Much of the by-product material from other operations in the plant was in the form of tea and cocoa leaves mixed with other fill material. In many instances, this material was used as a rich organic mulch for topsoil for gardens, flowers, and shrubbery and as general fill material for lawns. The elder Mr. Tripuka owned a vacant lot that is now 464 Davison Avenue, and between approximately 1944-1946 had many truck loads of this material deposited at the vacant lot. This material was used primarily for fill in a ditch that laterally traversed the back of several lots between Davison Avenue and Latham Street. Apparently, some of this mulch material contained thorium process wastes. Several neighbors in the area used this material for vegetable and flower gardens as well as fill for low spots in their lawns. The remaining unused material was pushed out and spread over the 464 Davison lot. The lot was sold and a house was built on the vacant lot in 1967.

The current owner of 460 Davison is Florence DiChiara. She has lived at this residence since 1952 and currently resides there with her 20-year-old daughter. The house was constructed about 1951. Front and rear views of the property are provided in Figs. 1 and 2, respectively. This lot is approximately 15 m wide by 37.5 m deep. The layout of the property is shown in Fig. 3.

SURVEY METHODS

The survey measurements were performed according to the survey plan of May 27, 1981.³ The action and survey plan for Maywood, New Jersey, is provided in Appendix I. A comprehensive description of the survey methods and instrumentation, as well as the radiation guidelines used in evaluating the data, have been provided in other reports (e.g., reference 4).

SURVEY RESULTS

Applicable federal guidelines have been summarized in Table 1. The normal background levels for the northern New Jersey area are presented

000630

in Table 2. These data are provided for comparison with the survey results presented in this section.

With the exception of measurements of transferable activity which represent net count rates, all direct measurement results presented in this report are gross readings; background radiation levels have not been subtracted. Similarly, background concentrations have not been subtracted from radionuclide concentrations measured in environmental samples.

Outdoor survey results

External gamma-ray and beta-gamma measurements. Results of grid point/grid block measurements are presented in Table 3. The location of grid points/blocks are shown in Fig. 3. The elevated gamma levels confirm the presence of contaminated material over much of the outdoor area in the back yard and on the east side of the front yard. A pattern of the most heavily contaminated areas can be obtained from observing the surface gamma-ray exposure rates given in Fig. 4. Highest measurements were along the entire east border of the property (adjacent to 464 Davison). Gamma radiation levels generally decreased from east to west across the yard. Elevated gamma levels were also observed in the back yard along the west border of the property line, and in the east side of the front yard in the lawn and shrubbery adjacent to the house. The maximum gamma-ray exposure rate at 1 m on this property (450 $\mu\text{R}/\text{h}$) exceeds the background value by a factor of 56 and guideline value by a factor of 7.5. Beta-gamma dose-rate measurements over the entire yard ranged from 0.03 to 2 mrad/h.

Systematic and biased soil samples. Systematic samples of surface soil (top 15 cm) and biased surface and subsurface soil samples were taken from various locations on the property for radionuclide analyses. Locations of the systematic (MJ samples) and biased (MJB samples) sampling locations are shown in Fig. 5, with results of laboratory analyses provided in Table 4. Concentrations of ^{232}Th exceeded the concentrations of ^{226}Ra and ^{238}U in all of the samples collected at 460 Davison Avenue. Based on the results of soil sample analyses, the contaminated material is located: (1) in the east half of the front yard in the lawn and

08 1534

08 1531

4

shrubby beds (the strip of lawn closest to the street is excluded); (2) over the entire back yard with the exception of (a) the south-center section (the area formed by MJ45, MJ47, MJ48, and MJ50) and (b) a 3-m x 14-m area around the sample locations MJ54-MJ56; and (3) low-level contamination along a 0.5-m wide strip along the entire west property line. One sample (MJB21) indicated that contaminated material extended from the surface to a depth greater than 86 cm along the east side of the back yard. Contaminated material extended down to 66 cm on the west side of the back yard (MJB22), and on the east side of the front yard, contaminated material extended from the surface to a depth greater than 36 cm (MJB20).

Concentrations of ^{232}Th in systematic surface soil samples ranged from 1.1 pCi/g (MJ50) to 28 pCi/g (MJ53). The maximum ^{232}Th concentration in soil in a biased sample from the back yard of this property was 1400 pCi/g (MJB21D). In the front yard, the maximum ^{232}Th concentration from a biased soil sample contained 620 pCi/g (MJB20B).

Augering and subsurface soil samples from augering. Results of analyses of soil samples taken during augering of holes are presented in Table 5, and locations of auger holes are shown in Fig. 6.

A summary of the results of gamma-ray logging of auger holes is presented in Table 6. The gamma-ray activity as a function of depth is graphically depicted in Appendix II. On the east side of the back yard (adjacent to 464 Davison), the contaminated material generally appeared to extend from the surface down to a depth of 90-120 cm (3-4 ft). On the west side of the back yard, the contaminated material appeared to extend from the surface to 45 cm (1.5 ft).

Indoor survey results

Alpha, beta-gamma, and gamma-ray measurements. Schematic diagrams of the interior of the house at 460 Davison Avenue are shown in Figs. 7 through 9. The results of the indoor measurements are presented in Table 7 and these figures.

Transferable long-lived alpha and beta-gamma activity on room surfaces was at the background level at all locations in the house. Direct alpha activity on the surface of walls and floors was in the normal background range at all locations in the house.

0 0 0 6 3 2

Beta-gamma dose rate measurements were within background levels at all locations in the house with the exception of the stairs to the first floor, where slightly elevated levels were observed (0.04 mrad/h).

External gamma-ray exposure rates inside the house were all elevated above background. Gamma-ray exposure rates at 1 m ranged from 10 to 34 $\mu\text{R}/\text{h}$, and averaged 16 $\mu\text{R}/\text{h}$. There was no evidence that the source of these elevated radiation levels was due to contaminated material indoor or beneath the floor of the basement. However, these measurements can be related to radiation arising from outdoor contamination. Indoor external gamma-ray measurements were highest at locations on the east side of the house.

Radon and radon daughter sampling. Preliminary radon daughter measurements were made in the basement and upstairs area of the house to determine the approximate magnitude of this exposure pathway. These measurements are indicative of radon levels only at the instant of sampling and do not represent daily or annual averages. Further sampling would be required to determine the levels in the house for comparison with applicable guidelines.

Results of radon and radon daughter measurements inside the house are presented in Table 8. Radon-222 concentrations in air were not measured in this residence. The radon daughter concentration in air in the basement (0.0019 WL) was within typical background levels.

SUMMARY

Summaries of the outdoor and indoor measurement results of the radiological survey conducted at 460 Davison Avenue are provided in Tables 9 and 10, respectively. These measurement results indicate that the property contains radioactive contamination primarily from the ^{232}Th decay chain, and to a lesser extent from the ^{238}U decay chain. This material is found in the following locations as shown in Fig. 10: (1) most of the vegetated area of the back yard with the exception of the area in the center rear of the back yard; (2) the lawn and shrubbery area in the east side of the front yard (excluding the strip of lawn adjacent to the street); and (3) along the length of the west property line (within the top 45-cm of the ground surface). The contaminated

3
3
6
0
0
0

08 15 5 4

material extends from the ground surface, down to an average depth of 1.0 m. No contaminated material is believed to be present inside the house and beneath the floor and foundations of the house.

The total estimated volume of contaminated materials on this property is approximately 195 m³ (see Table 11). This estimate is based on an average depth of 1 m in the back yard (110 m² area), 0.15 m along the west side of the house (3 m² area), 0.5 m along the east side of the property (11 m² area), and 1 m in the front yard (18 m² area). Due to the limited number of core holes on which these estimates were based, the total volume may exceed this estimate by as much as 30%.

Outdoors on the property, the average external gamma-ray exposure rate at 1 m above the ground surface was approximately a factor of 0.8 of the NRC guideline for continuous exposure (10 CFR 20). All measured values of external gamma radiation outdoors were above the background level for the Maywood area. Concentrations of ²³²Th in the surface soil of the yard exceeded background levels ranging from a factor of 1.2 to 1500.

Inside the house, the average external exposure rate at 1 m above the floor was well within NRC guidelines for continuous exposure (10 CFR 20), but approximately twice background levels. This elevated activity is due to the presence of contaminated materials outdoors. No radioactive material was found inside the house or beneath the basement floor. Radon daughter concentrations observed in the basement of the house were within background levels.

Using the results of this radiological survey, a preliminary evaluation of the potential exposure pathways for radiation exposures to residents at this location has been conducted. The four primary pathways for radiation exposure from the type of contamination found on this property are: (1) direct radiation exposures; (2) inhalation of radon and radon daughter products; (3) inhalation of resuspended radioactive particles; and (4) ingestion of radionuclides through food pathways. An evaluation of the first two pathways is provided in Appendix III. The latter two pathways are not considered to be significant at this property, under present conditions of property use. These pathways could become significant if major changes in land use occur in the future.

000634

08 1534

7

Based on conservative assumptions, preliminary estimates of the total risk of cancer from radiological conditions at this site are given in Appendix III. The estimated total increased risk due to radiation induced cancer for residents at 460 Davison Avenue was calculated to be 0.07%.^a Thus, for a person living a lifetime at 460 Davison Avenue, the hypothetical average chance of dying from cancer would increase from 24.4% (the average for Bergen County, New Jersey in 1975^b) to 24.47%.

0 0 0 6 3 5

REFERENCES

1. EG&G, *An Aerial Radiological Survey of the Stepan Chemical Company and Surrounding Area, Maywood, New Jersey*, EG&G Survey Report NRC-8109, April 1981.
2. Nuclear Regulatory Commission, memorandum from M. Campbell to J. D. Kinnerman, re: Records of Surveys of Private Homes in Maywood, New Jersey, Docket No. 40-8610, May 15, 1981.
3. W. A. Goldsmith to R. W. Barber, Letter of May 28, 1981, transmitting Action Plan and Radiological Survey Plan for Maywood, New Jersey.
4. R. W. Leggett, D. L. Anderson, D. J. Christian, W. D. Cottrell, D. J. Crawford, R. W. Doane, W. A. Goldsmith, F. F. Haywood, T. E. Myrick, W. H. Shinpaugh, and E. B. Wagner, *Radiological Survey of Properties in the Middlesex, New Jersey, Area*, DOE/EV-0005/1 (Supplement) ORNL-5680, March 1981.
5. U.S. Department of Energy, *Radiological Survey of the Middlesex Municipal Landfill, Middlesex, New Jersey*, DOE/EV-0005/20, April 1980.
6. A. C. George and A. J. Breslin, "The Distribution of Ambient Radon and Radon Daughters in Residential Buildings in the New Jersey - New York Area," *Proceedings of the Natural Radiation Environment III*, pp. 1272-93, CONF-780422 (Vol. 2), NTIS, 1980.
7. T. E. Myrick and B. A. Berven, *State Background Radiation Levels: Results of Measurements Taken During 1975-1979*, ORNL/TM-7343, Oak Ridge National Laboratory (in press).
8. W. Healy and W. J. Bair, "Preliminary Report - Radiological Appraisal of Houses in Maywood, New Jersey". Attachment to letter from W. J. Bair, Battelle Pacific Northwest Laboratories to W. E. Mott, Department of Energy, Washington, D.C., July 17, 1981.
9. U. S. Department of Health, Education and Welfare, *Vital Statistics of the United States - 1975, Volume II - Mortality, Part B, Public Health Service, National Center for Health Statistics, (PHS) 78-1102, 1977.*

000636

9

08 1534



Fig. 1. Front view of property at 460 Davison Avenue

000637

10

08 15 54



Fig. 2. Rear view of property at 460 Davison Avenue

0 0 0 8 3 8

000639

08 1534

11

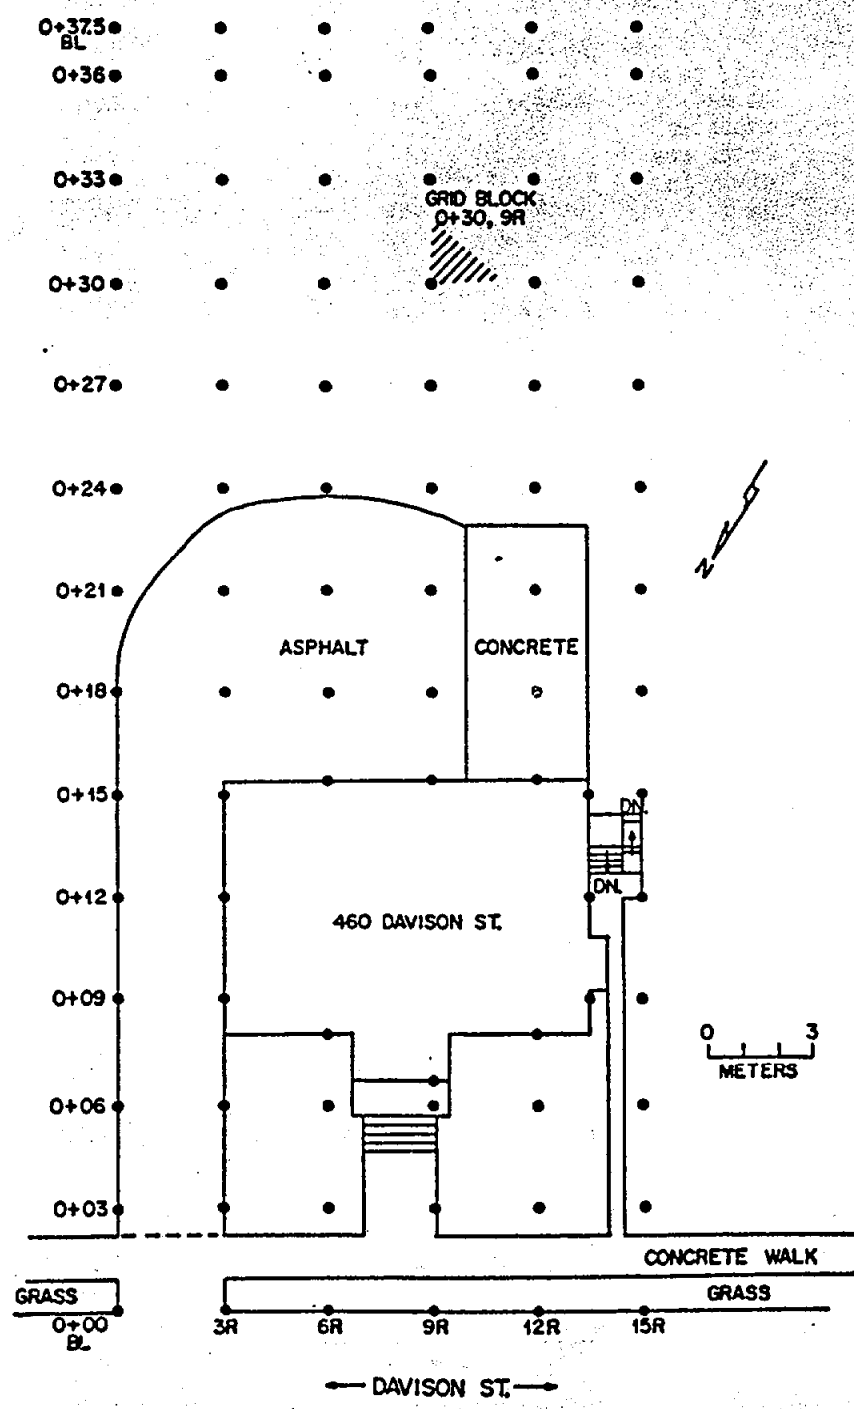


Fig. 3. Grid point and grid block locations at 460 Davison Avenue

08 153 /

12

Grid point
gamma-ray
exposure
rates are
given in
 $\mu\text{R/h}$.

| | | | | | |
|-----------------|-----|-----|-----|-----|-----|
| 0+37.5•58 BL | •31 | •21 | •19 | •14 | •25 |
| 0+36•310 | •31 | •21 | •15 | •27 | •31 |
| 0+33•410 | •33 | •15 | •15 | •41 | •35 |
| 0+30•270 | •31 | •23 | •21 | •21 | •15 |
| 0+27•210 | •31 | •21 | •21 | •25 | •15 |

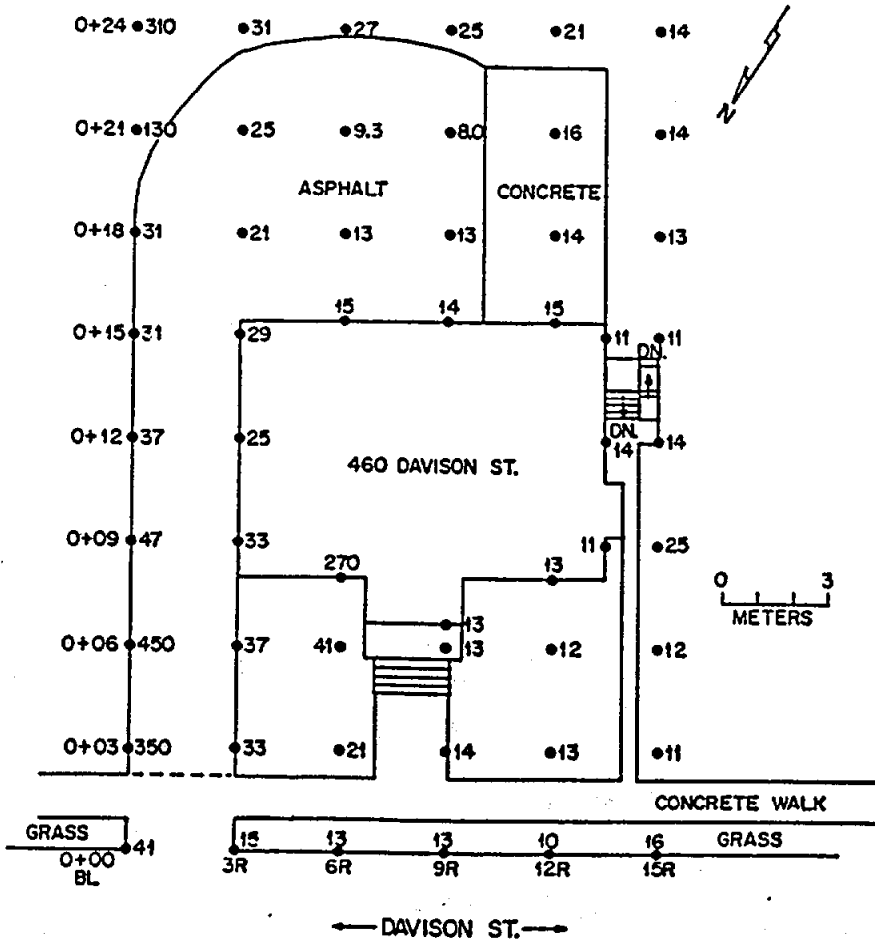


Fig. 4. External gamma-ray measurements ($\mu\text{R/h}$) at the ground surface at 460 Davison Avenue.

000840

000641

08 153 4

13

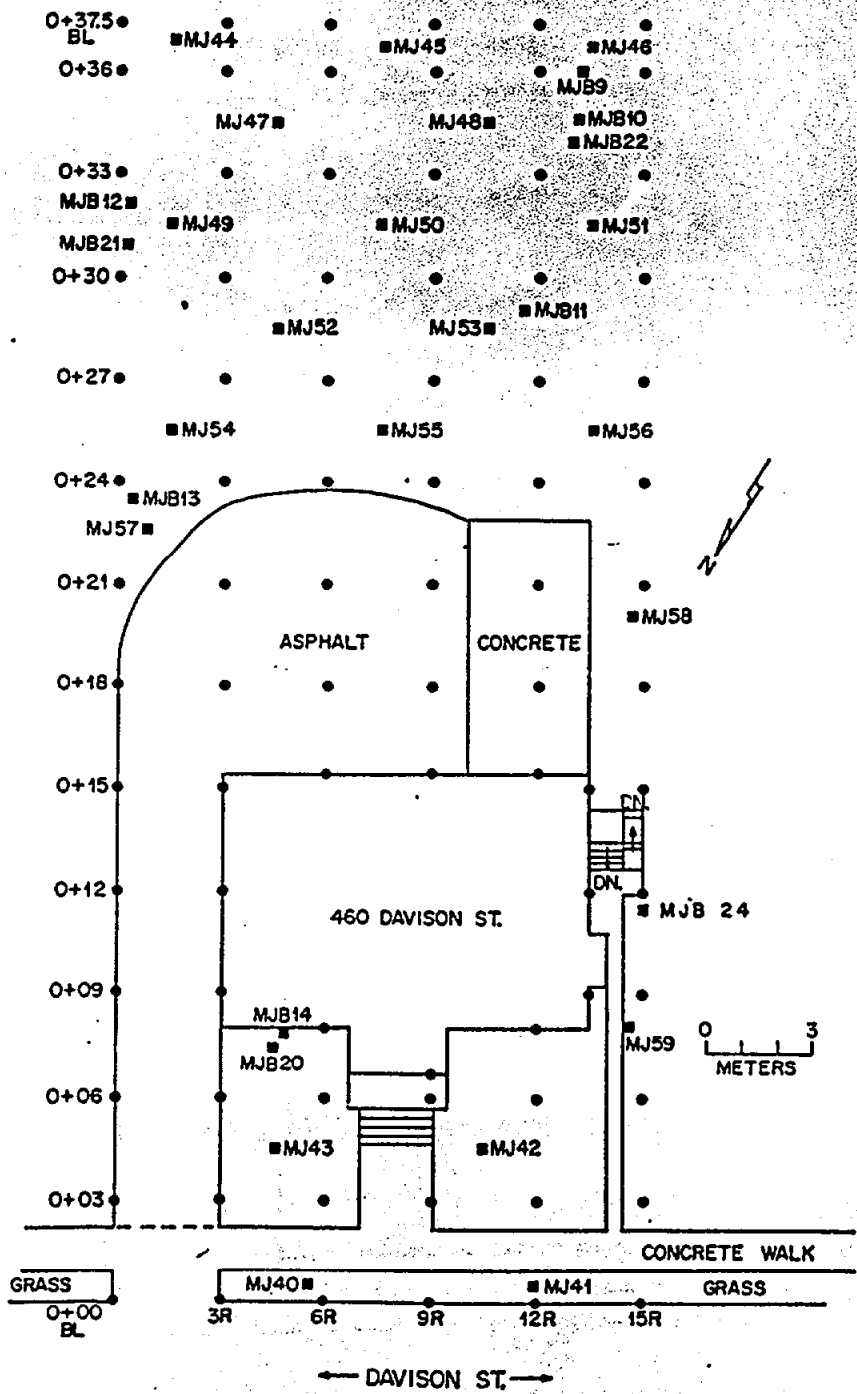


Fig. 5. Location of systematic (MJ) and biased (MJB) soil samples at 460 Davison Avenue.


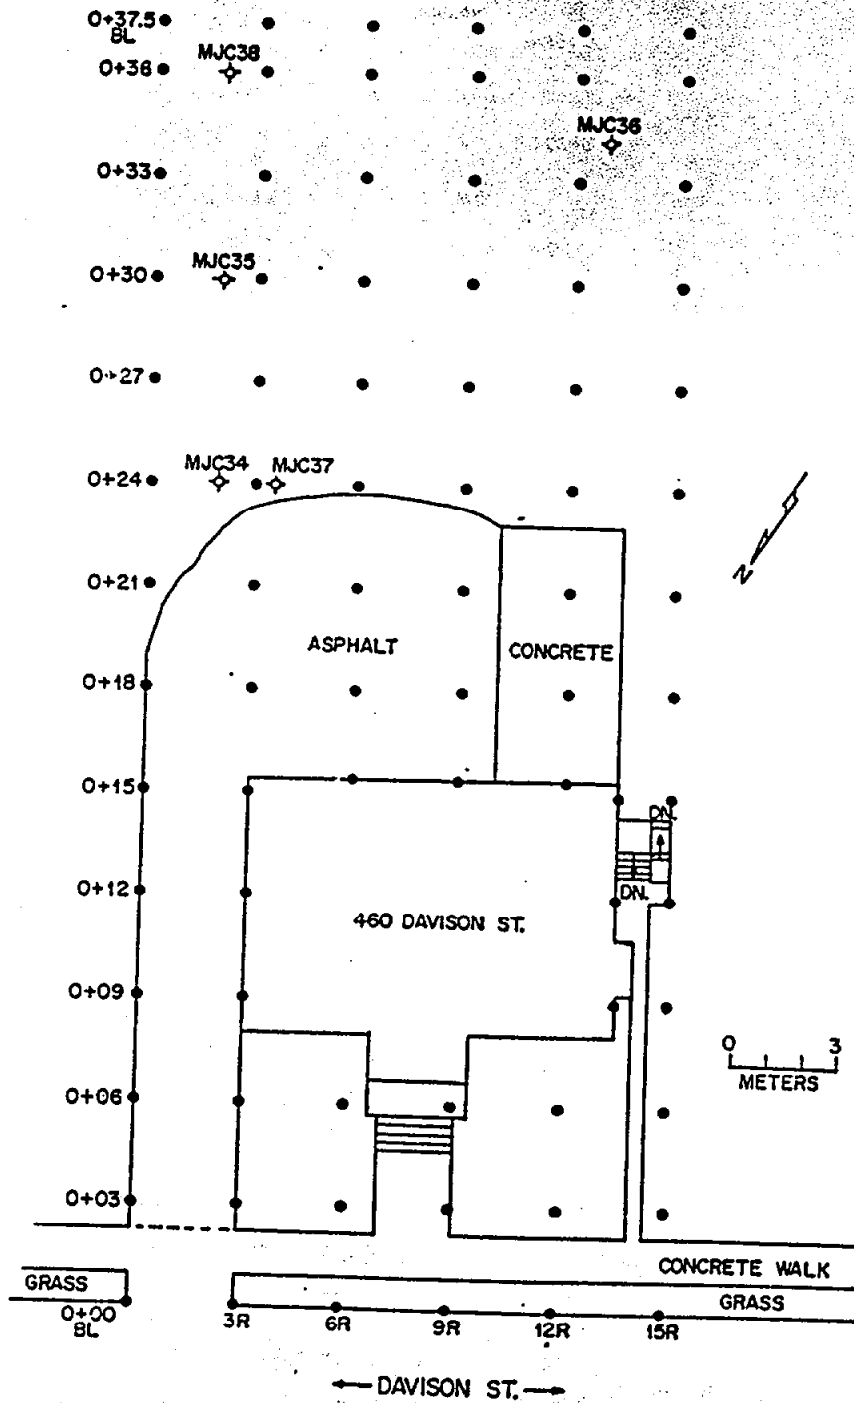


Fig. 6. Location of drill holes at 460 Davison Avenue

0 | 0 | 0 | 6 | 4 | 2

All gamma-ray exposure rate measurement results are given in $\mu\text{R/h}$ at 1 m above the surface.

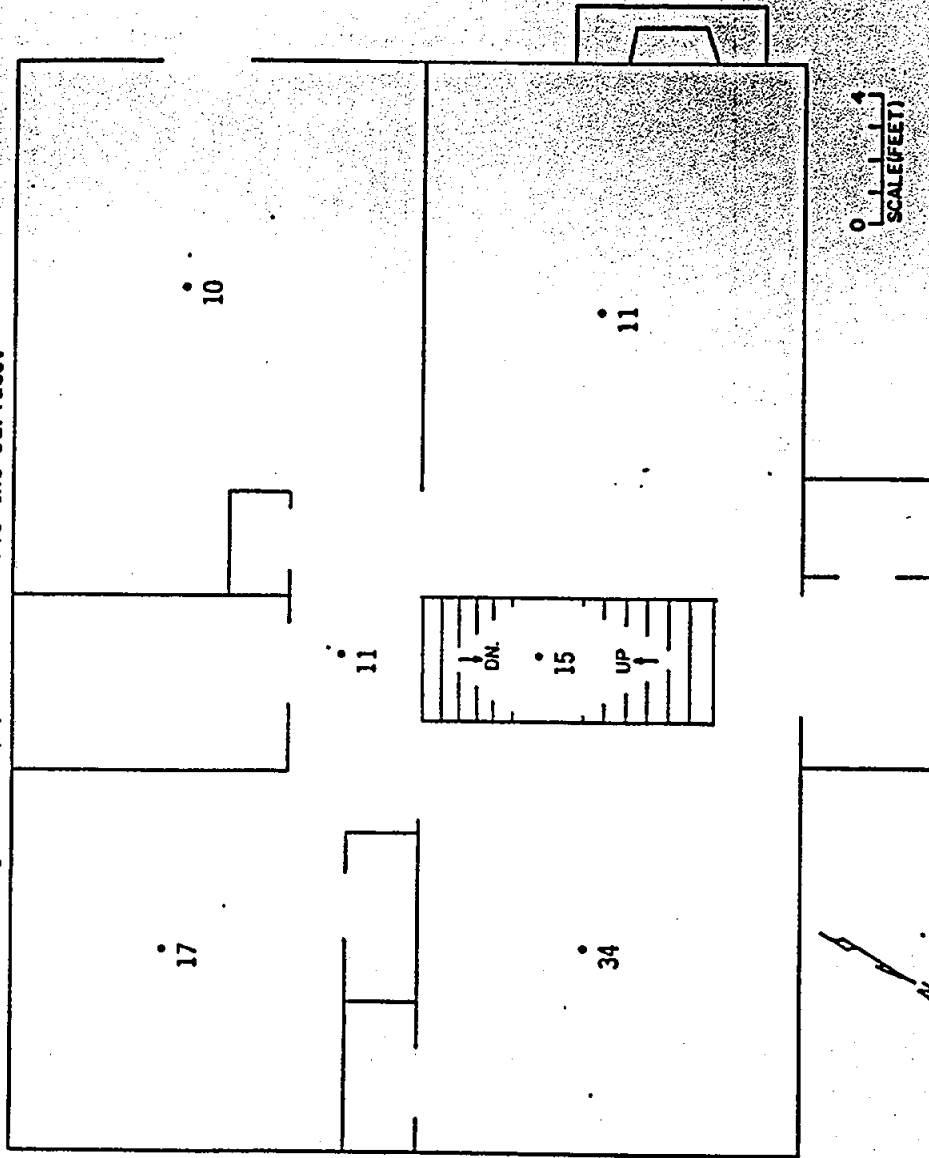

FIRST LEVEL
460 DAVISON ST.
Fig. 7. Schematic of the first level floor plan at 460 Davison Avenue showing external gamma-ray measurement results ($\mu\text{R/h}$).

0 0 0 6 4 3

All gamma-ray exposure rate measurement results
are given in $\mu\text{R/h}$ at 1 m above the surface.


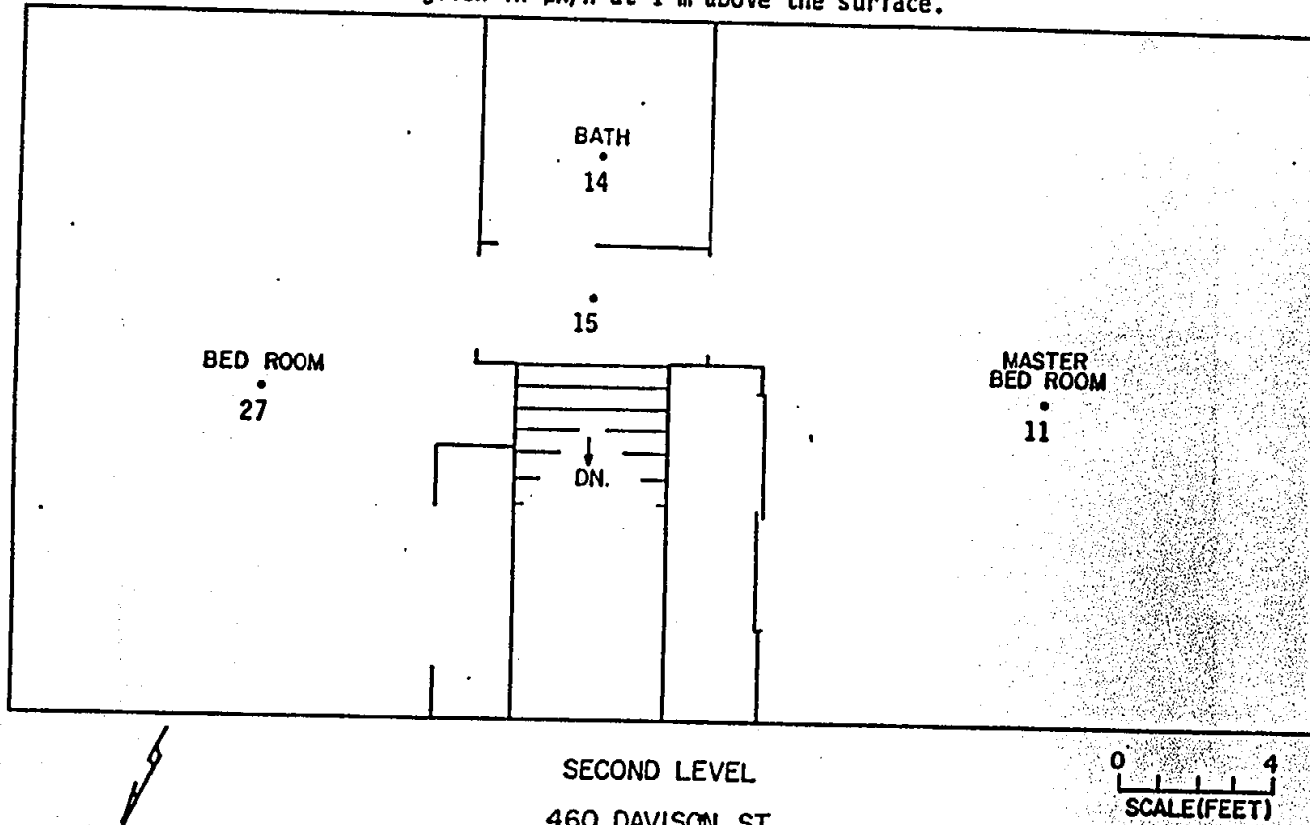


Fig. 8. Schematic of second level floor plan at 460 Davison Avenue showing external gamma-ray measurement results ($\mu\text{R/h}$).

0 0 0 6 4 4

All gamma-ray exposure rate measurement results are given in $\mu\text{R/h}$ at 1 m above the surface.

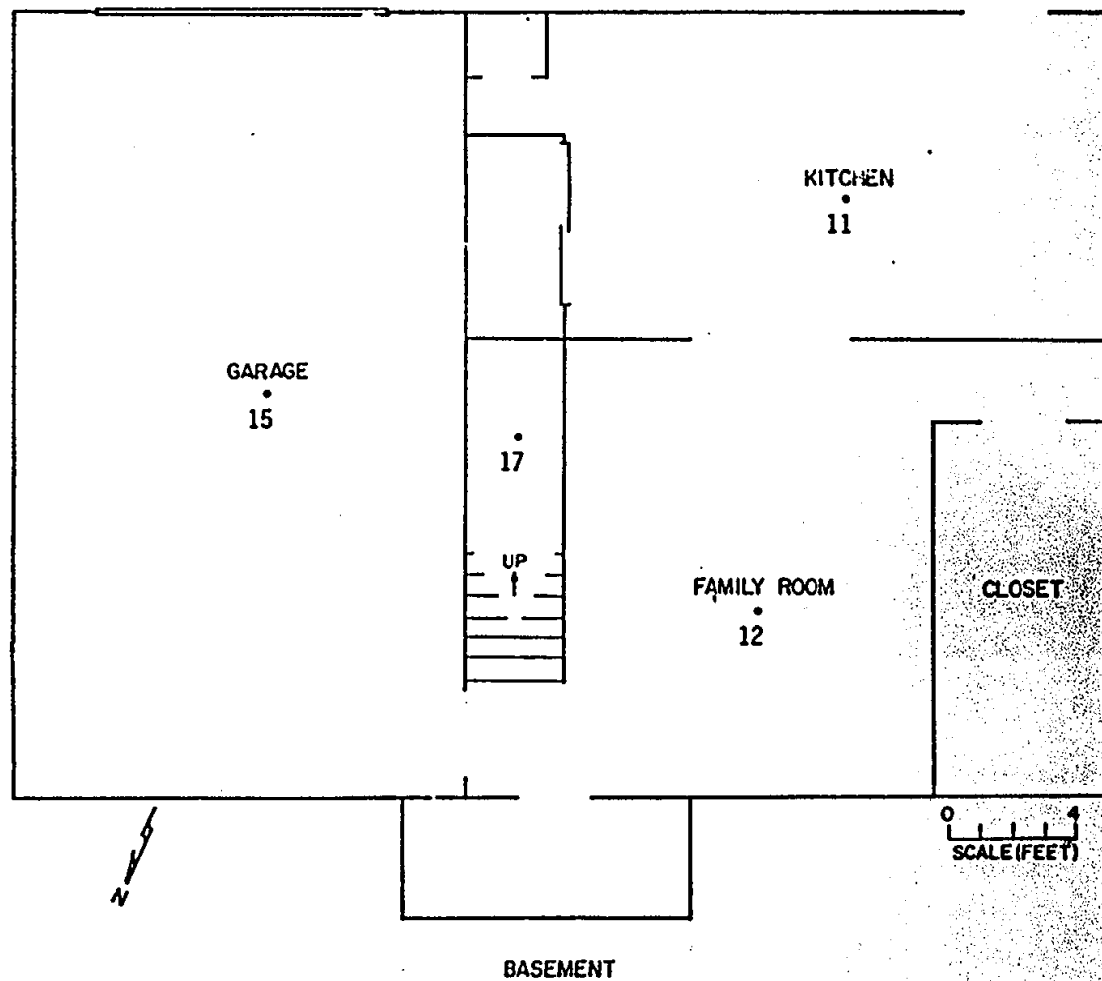

460 DAVISON ST.

Fig. 9. Schematic of basement floor plan at 460 Davison Avenue showing external gamma-ray measurement results ($\mu\text{R/h}$).

08 1534

0 0 0 6 4 5

000646

08 1534

18

▨ LOCATION OF ²³²Th CONTAMINATED MATERIAL

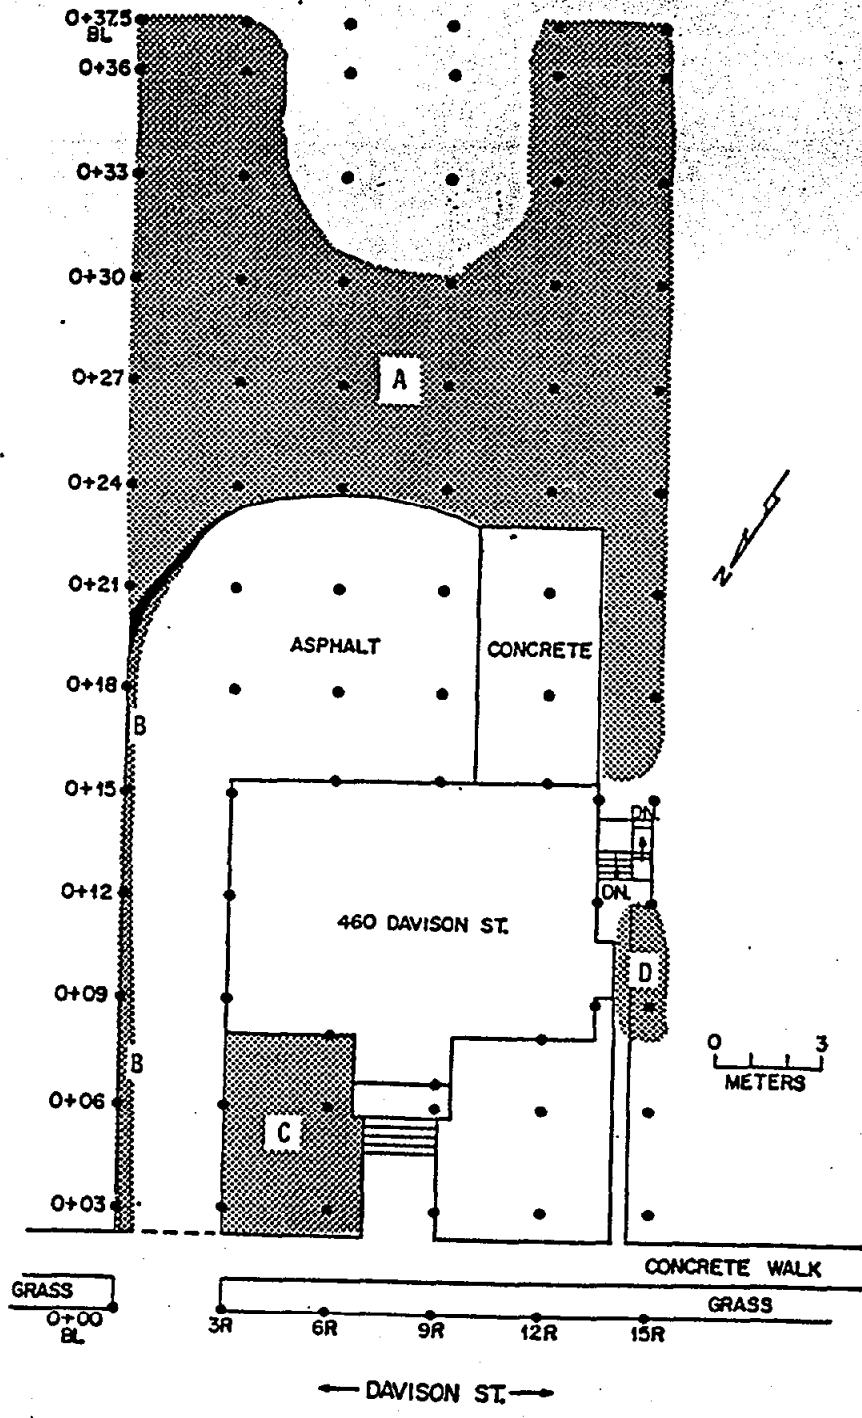


Fig. 10. Estimated extent of contaminated areas at 460 Davison Avenue.

Table 1. A summary of applicable radiation guidelines

| Mode of exposure | Exposure conditions | Guideline value | Guideline source |
|---------------------------------------|---|--|--|
| 1. External gamma radiation | Continuous exposure to individual in general population (whole body) | 60 μ R/h | Nuclear Regulatory Commission (NRC) - Standards for Protection Against Radiation (10 CFR 20.105) |
| 2. Surface alpha contamination | ^{226}Ra contamination fixed on surfaces | 100 dpm/100 cm^2 | NRC Guidelines for Decontamination of Facilities and Equipment Prior to Release for Unrestricted Use or Termination of Licenses for By-product, Source, or Special Nuclear Material (Adapted from NRC Reg. Guide 1.86) |
| | Removable ^{226}Ra contamination | 20 dpm/100 cm^2 | |
| 3. Surface beta contamination | Removable beta-gamma emitters | 1000 dpm/100 cm^2 | Same as number 2 |
| 4. Beta-gamma dose rates | Average dose rate on an area no greater than 1 m^2 | 0.20 mrad/h | Same as number 2 |
| | Maximum dose rate in any 100 cm^2 area | 1.0 mrad/h | Same as number 2 |
| 5. Exposure to radon | Maximum permissible concentration of ^{222}Rn in air in unrestricted areas | 3.0 pCi/L | NRC 10 CFR 20.103, Appendix B, Table II |
| 6. Radionuclides in water | Maximum contaminant level for combined ^{226}Ra and ^{228}Ra in drinking water | 5 pCi/L | EPA Interim Standards 40 CFR 141.15 |
| | Maximum permissible concentration of the following radionuclides in water for unrestricted areas ^{226}Ra ^{238}U ^{230}Th ^{210}Pb | 30 pCi/L 40,000 pCi/L 2,000 pCi/L 100 pCi/L | NRC 10 CFR 20.103, Appendix B, Table II |
| 7. Airborne ^{222}Rn progeny | Remedial action indicated if ^{222}Rn progeny exceed this concentration because of uranium mill tailings under or around the structure | 0.01 WL | 10 CFR 712.7 |

19

081534

0 0 0 6 4 7

Table 2. Background radiation levels for the northern New Jersey area.

| Type of radiation measurement or sample | Radiation level or radionuclide concentration |
|--|--|
| Gamma-ray exposure rate at 1 m above floor or ground surface ($\mu\text{R/h}$) | 8 ^a |
| Direct alpha activity on indoor floor or wall surface (dpm/100 cm ²) | 26 |
| Transferable alpha activity on indoor floor or wall surface (dpm/100 cm ²) | 10 |
| Transferable beta-gamma activity on indoor floor or wall surface (dpm/100 cm ²) | 20 |
| Beta-gamma dose rate activity on ground, floor and wall surfaces (mrad/h) | 0.01 - 0.03 |
| Indoor radon concentration (pCi/L) | |
| Basement | 1.7 ^b |
| Upstairs | 0.8 ^b |
| Indoor radon daughter concentration (WL) | |
| Basement | 0.008 ^b |
| Upstairs | 0.004 ^b |
| Concentration of radionuclides in soil (pCi) | |
| ²³² Th | 0.9 ^c |
| ²³⁸ U | 0.9 ^c |
| ²²⁶ Ra | 0.9 ^c |

^aReference 5.^bReference 6.^cReference 7.

000648

Table 3. Outdoor measurements at 460 Davison Avenue

| Grid location ^a | Grid point meas ^b | | | Grid block meas ^c | | |
|----------------------------|------------------------------|--------------------------------------|--|---|---|--|
| | Gamma exposure at 1 m (μR/h) | Gamma exposure at the surface (μR/h) | Beta-gamma dose rate at 1 cm above the surface ^e (mrad/h) | Maximum gamma exposure at 1 m ^c (μR/h) | Maximum gamma exposure at the surface ^e (μR/h) | Beta-gamma dose rate at maximum 1 cm above the surface ^e (mrad/h) |
| 0*00, BL | 62 | 41 | | 230 | 330 | 0.6 |
| 0*03, BL | 330 | 350 | 0.7 | 450 | 550 | 2 |
| 0*06, BL | 410 | 450 | 0.8 | 360 | 410 | 0.9 |
| 0*09, BL | 100 | 47 | | | 41 | |
| 0*12, BL | 41 | 37 | | | 25 | |
| 0*15, BL | 62 | 31 | | | 27 | |
| 0*18, BL | 72 | 31 | | 110 | 100 | |
| 0*21, BL | 100 | 130 | 0.1 | 130 | 250 | |
| 0*24, BL | 120 | 310 | 0.4 | 130 | 190 | |
| 0*27, BL | 160 | 210 | 0.3 | 210 | 250 | |
| 0*30, BL | 210 | 270 | 0.6 | 210 | 460 | |
| 0*33, BL | 230 | 410 | 1 | 210 | 360 | |
| 0*36, BL | 140 | 310 | 0.6 | 120 | 210 | |
| 0*37.5, BL | 82 | 58 | | | | |
| 0*00, 3R | 160 | 150 | | | 31 | |
| 0*03, 3R | 41 | 33 | | | 45 | |
| 0*06, 3R | 66 | 37 | | 120 | 350 | 0.5 |
| 0*09, 3R | 49 | 33 | | | | |
| 0*12, 3R | 29 | 25 | 0.03 | | | |
| 0*15, 3R | 25 | 29 | | | 21 | |
| 0*18, 3R | 21 | 21 | | | 21 | |
| 0*21, 3R | 37 | 25 | | | 31 | |
| 0*24, 3R | 41 | 31 | | | 31 | |
| 0*27, 3R | 49 | 31 | | 35 | 51 | |
| 0*30, 3R | 51 | 31 | | | 31 | |
| 0*33, 3R | 62 | 33 | 0.03 | | 29 | |
| 0*36, 3R | 49 | 31 | | | 27 | |
| 0*37.5, 3R | 37 | 31 | | | | |
| 0*00, 6R | 15 | 13 | | | 17 | |
| 0*03, 6R | 25 | 21 | | | 41 | |
| 0*06, 6R | 58 | 41 | | 100 | 210 | 0.4 |
| 0*08, 6R | 97 | 270 | 0.05 | | | |
| 0*16, 6R | 15 | 15 | | | 14 | |

21

081534

0 0 0 6 4 9

Table 3. (continued)

| Grid location ^a | Grid point measurements ^b | | | Grid block measurements ^c | | |
|----------------------------|--------------------------------------|---|--|---|--|--|
| | Gamma exposure at 1 m (μR/h) | Gamma exposure at the surface ^d (μR/h) | Beta-gamma dose rate at 1 cm above the surface ^e (mrad/h) | Maximum gamma exposure at 1 m ^g (μR/h) | Maximum gamma exposure at the surface (μR/h) | Beta-gamma dose rate at maximum 1 cm above the surface ^h (mrad/h) |
| 0*18, 6R | 16 | 13 | | | | |
| 0*21, 6R | 8.8 | 9 | | 23 | 25 | |
| 0*24, 6R | 31 | 27 | 0.03 | | 23 | |
| 0*27, 6R | 23 | 21 | | 25 | 31 | |
| 0*30, 6R | 29 | 23 | | | 25 | |
| 0*33, 6R | 29 | 15 | | | 21 | |
| 0*36, 6R | 25 | 21 | | | 21 | |
| 0*37.5, 6R | 21 | 21 | | | | |
| 0*00, 9R | 13 | 13 | | | 13 | |
| 0*03, 9R | 14 | 14 | | | 13 | |
| 0*06, 9R | 21 | 13 | | | 14 | |
| 0*16, 9R | 14 | 14 | | | 16 | |
| 0*18, 9R | 14 | 13 | | | 16 | |
| 0*21, 9R | 15 | 8 | | | 27 | |
| 0*24, 9R | 25 | 25 | 0.06 | 25 | 38 | |
| 0*27, 9R | 21 | 21 | | 35 | 76 | |
| 0*30, 9R | 31 | 21 | | 31 | 31 | |
| 0*33, 9R | 25 | 15 | | 33 | 51 | |
| 0*36, 9R | 27 | 15 | | | 21 | |
| 0*37.5, 9R | 21 | 19 | | | | |
| 0*00, 12R | 11 | 10 | | 14 | 25 | |
| 0*03, 12R | 13 | 13 | | | 15 | |
| 0*06, 12R | 12 | 12 | | 12 | 25 | |
| 0*08, 12R | 12 | 13 | | | | |
| 0*16, 12R | 15 | 15 | | | 15 | |
| 0*18, 12R | 16 | 14 | | | 15 | |
| 0*21, 12R | 16 | 16 | | | 16 | |
| 0*24, 12R | 21 | 21 | | 27 | 41 | 0.08 |
| 0*27, 12R | 25 | 25 | | 31 | 31 | |
| 0*30, 12R | 25 | 21 | | 41 | 82 | |
| 0*33, 12R | 35 | 41 | 0.05 | 51 | 120 | |
| 0*36, 12R | 27 | 27 | 0.03 | 45 | 97 | |

22

081534

000650

Table 3. (continued)

| Grid location ^a | Grid point measurements ^b | | | Grid block measurements ^c | | |
|----------------------------|---|--|--|--|---|--|
| | Gamma exposure at 1 m ($\mu\text{R/h}$) | Gamma exposure at the surface ^d ($\mu\text{R/h}$) | Beta-gamma dose rate at 1 cm above the surface ^e (mrad/h) | Maximum gamma exposure at 1 m ^e ($\mu\text{R/h}$) | Maximum gamma exposure at the surface ($\mu\text{R/h}$) | Beta-gamma dose rate at maximum 1 cm above the surface ^e (mrad/h) |
| 0*37.5, 12R | 16 | 14 | | | | |
| 0*12, 13R | 12 | 14 | | | | |
| 0*15, 13R | 13 | 11 | | | 14 | |
| 0*09, 14R | 12 | 11 | | | | |
| 0*00, 15R | 12 | 16 | | | 23 | |
| 0*03, 15R | 11 | 11 | 0.06 | | | |
| 0*06, 15R | 11 | 12 | | | | |
| 0*09, 15R | 11 | 25 | | | | |
| 0*12, 15R | 11 | 14 | | | | |
| 0*15, 15R | 11 | 11 | | | | |
| 0*18, 15R | 13 | 13 | | | | |
| 0*21, 15R | 14 | 14 | | | | |
| 0*24, 15R | 12 | 14 | | | | |
| 0*27, 15R | 15 | 15 | | | | |
| 0*30, 15R | 16 | 15 | | | | |
| 0*33, 15R | 31 | 35 | 0.04 | | | |
| 0*36, 15R | 25 | 31 | 0.05 | | | |
| 0*37.5, 15R | 21 | 25 | | | | |

^aGrid location is shown in Fig. 3.

^bGrid point measurements are discrete measurements at each grid point.

^cGrid block measurements are obtained by a gamma-ray scan of entire block.

^dThese values are shown in Fig. 4.

^eAbsence of a value indicates no measurement was taken.

23

081534

000651

Table 4. Results of radionuclide analyses of surface soil samples from 460 Davison Avenue

| Sample ^a | Location ^b | Depth ^c (cm) | Radionuclide concentration (pCi/g) | | |
|---------------------|-----------------------|----------------------------|------------------------------------|-------------------------------|--------------------------------|
| | | | ²³² Th ^d | ²³⁸ U ^e | ²²⁶ Ra ^d |
| MJ40 | 0+0.5, 5.5R | | 2.6 ± 0.08 | 2.0 | 1.2 ± 0.06 |
| MJ41 | 0+0.4, 12R | | 1.8 ± 0.04 | 1.7 | 1.1 ± 0.03 |
| MJ42 | 0+0.5, 10.5R | | 1.5 ± 0.3 | 2.6 | 1.4 ± 0.2 |
| MJ43 | 0+0.5, 4.5R | | 6.3 ± 0.1 | 2.5 | 3.4 ± 0.1 |
| MJ44 | 0+36.7, 1.5R | | 21 ± 0.5 | 2.8 | 4.8 ± 0.07 |
| MJ45 | 0+36.7, 7.5R | | 1.3 ± 0.04 | 1.8 | 0.9 ± 0.04 |
| MJ46 | 0+36.7, 13.5R | | 7.8 ± 0.1 | 1.6 | 2.4 ± 0.06 |
| MJ47 | 0+34.5, 4.5R | | 1.7 ± 0.2 | 3.2 | 1.3 ± 0.07 |
| MJ48 | 0+34.5, 10.5R | | 2.0 ± 0.09 | 1.6 | 1.2 ± 0.1 |
| MJ49 | 0+31.5, 1.5R | | 6.7 ± 0.2 | 3.4 | 1.9 ± 0.1 |
| MJ50 | 0+31.5, 7.5R | | 1.1 ± 0.07 | 1.7 | 0.7 ± 0.06 |
| MJ51 | 0+31.5, 13.5R | | 10 ± 1 | 2.2 | 2.6 ± 0.06 |
| MJ52 | 0+28.5, 4.5R | | 27 ± 3 | 2.6 | 10 ± 0.4 |
| MJ53 | 0+28.5, 10.5R | | 28 ± 0.6 | 2.7 | 10 ± 0.3 |
| MJ54 | 0+25.5, 1.5R | | 1.6 ± 0.08 | 1.3 | 0.9 ± 0.06 |
| MJ55 | 0+25.5, 7.5R | | 2.1 ± 0.04 | 1.0 | 0.9 ± 0.03 |
| MJ56 | 0+25.5, 13.5R | | 2.2 ± 0.8 | 1.8 | 1.0 ± 0.02 |
| MJ57 | 0+22.5, 0.7R | | 9.7 ± 1 | 1.9 | 2.2 ± 0.3 |
| MJ58 | 0+20, 14.8R | | 5.5 ± 0.2 | 0.94 | 3.6 ± 0.2 |
| MJ59 | 0+08, 14.8R | | 2.3 ± 0.07 | 1.9 | 1.9 ± 0.07 |
| MJB9 | 0+36, 13.2R | | 130 ± 20 | 6.9 | 34 ± 2 |
| MJB10 | 0+34.5, 13R | | 98 ± 10 | 4.9 | 20 ± 1 |
| MJB11 | 0+29, 11.5R | | 50 ± 7 | 3.6 | 17 ± 1 |
| MJB12 | 0+32, 0.2R | | 270 ± 50 | 21 | 59 ± 7 |
| MJB13 | 0+23.5, 0.2R | | 57 ± 7 | 6.3 | 8.0 ± 2 |
| MJB14 | 0+7.7, 4.7R | | 140 ± 20 | 8.3 | 66 ± 5 |
| MJB20 | 0+7.5, 4.5R | | 350 ± 5 | 15 | 140 ± 3 |
| MJB20a | 0+7.5, 4.5R | 15-30 | 620 ± 60 | 21 | 250 ± 1 |
| MJB20C | 0+7.5, 4.5R | 30-36 | 44 ± 0.6 | 2.4 | 14 ± 0.2 |
| MJB21A | 0+31, 0.1R | | 270 ± 40 | 23 | 52 ± 4 |
| MJB21B | 0+31, 0.1R | 15-30 | 300 ± 90 | 28 | 55 ± 4 |
| MJB21C | 0+31, 0.1R | 30-46 | 600 ± 70 | 61 | 81 ± 3 |
| MJB21D | 0+31, 0.1R | 51-61 | 1400 ± 200 | 120 | 200 ± 20 |
| MJB21E | 0+31, 0.1R | 71-86 | 50 ± 8 | 5.2 | 7.5 ± 0.4 |
| MJB22A | 0+34, 13R | 5-20 | 70 ± 11 | 4.3 | 13 ± 1 |
| MJB22B | 0+34, 13R | 20-36 | 3.4 ± 0.1 | 1.1 | 1.1 ± 0.2 |
| MJB22C | 0+34, 13R | 36-51 | 3.9 ± 0.2 | 1.5 | 1.6 ± 0.2 |
| MJB22D | 0+34, 13R | 51-66 | 4.1 ± 0.09 | 1.9 | 2.0 ± 0.04 |
| MJB24A' | 0+12, 15R | | 47 ± 6.0 | 2.2 | 21 ± 1.4 |
| MJB24B | 0+12, 15R | 10-20 | 2.0 ± 0.04 | 0.53 | 1.2 ± 0.05 |

^aMJ is a systematic surface (0-15 cm) soil sample; MJB is a biased soil sample.

^bLocation is shown on Fig. 5.

^cSample taken in the top 15 cm of the soil unless otherwise noted.

^dIndicated counting error is at the 95% confidence level.

^eTotal error on measurement results is less than ±3% error (95% confidence level).

000852

Table 5. Results of radionuclide analyses of subsurface soil samples from 460 Davison Avenue

| Sample | Location ^a | Depth (cm) | Radionuclide concentration (pCi/g) | | |
|--------|-----------------------|------------|------------------------------------|-------------------------------|--------------------------------|
| | | | ²³² Th ^b | ²³⁸ U ^c | ²²⁶ Ra ^b |
| MJC34 | 0+24, 2R | 110-120 | 2.6 ± 0.03 | 1.1 | 0.94 ± 0.02 |
| MJC35 | 0+30, 2R | 61 | 7.0 ± 0.2 | 2.1 | 1.8 ± 0.1 |
| MJC37 | 0+24, 3.5R | 30 | 2.1 ± 0.06 | 0.61 | 0.87 ± 0.04 |
| MJC38 | 0+36, 2R | 46-61 | 23 ± 3 | 2.4 | 8.9 ± 0.3 |

^aLocation is shown on Fig. 6.

^bIndicated counting error is at the 95% confidence level ($\pm 2\sigma$).

^cTotal error on measurement results is less than $\pm 3\%$ error (95% confidence level).

000653

Table 6. Summary of gamma logging of auger holes at 460 Davison Avenue

| Hole | Location ^a | Depth of hole (m) | Estimated extent of contaminated soil (m) | Depth of maximum contamination (m) | Measurement at depth of maximum contamination ^b (cpm) |
|-------|-----------------------|----------------------|---|--|---|
| MJC34 | 0+24, 2R | 1.07 | 0-1.1 | 0.91 | 4,800 |
| MJC35 | 0+30, 2R | 1.22 | 0-0.91 | 0.76 | 1,800 |
| MJC36 | 0+34, 13R | 0.91 | 0-0.45 | 0.15 | 13,000 |
| MJC37 | 0+24, 3.5R | 1.07 | 0-0.45 | 0.30 | 1,200 |
| MJC38 | 0+36, 2R | 1.22 | 0-0.76 | 0.45 | 1,250 |

^aLocation of these auger holes is shown on Fig. 6.

^bBackground for this measurement is typically 1200 ± 700 counts per minute (cpm).

26

081534

0 0 0 6 5 4

Table 7. Indoor measurements at 460 Davison Avenue

| Location ^a | External gamma exposure rate ($\mu\text{R}/\text{h}$) | | | Beta-gamma dose rate at 1 cm (mrad/h) | | Average direct alpha activity on surface ($\text{dpm}/100 \text{ cm}^2$) | Transferable alpha activity/Transferable beta-gamma activity ($\text{dpm}/100 \text{ cm}^2$) |
|-----------------------|---|-----------------|---------------------|---|---------------------------|--|--|
| | Center of room at 1 m | Surface maximum | location of maximum | Center of room | Location of gamma maximum | | |
| <u>Street level</u> | | | | | | | |
| Living room (NW room) | 11 | 12 | b | 0.02 | b | <26 | <10/<20 |
| Dining room (NE room) | 34 | 36 | Northeast wall | 0.02 | 0.03 | <26 | c |
| Hall | 11 | 15 | b | 0.02 | b | <26 | c |
| Den (SE room) | 17 | 27 | East corner of room | 0.03 | 0.02 | <26 | c |
| Kitchen (SW room) | 10 | 11 | b | 0.01 | b | <26 | c |
| Stair to 2nd floor | 15 | 15 | b | 0.02 | b | <26 | c |
| <u>Second level</u> | | | | | | | |
| Hall | 15 | 15 | b | 0.01 | b | <26 | <10/<20 |
| NE bedroom | 27 | 36 | North wall | 0.02 | 0.05 | <26 | c |
| Bathroom | 14 | 14 | b | 0.02 | b | <26 | c |
| Master bedroom (SW) | 11 | 11 | b | 0.02 | b | <26 | c |
| <u>Basement</u> | | | | | | | |
| Family room | 12 | 14 | b | 0.02 | b | <26 | c |
| Kitchen | 11 | 13 | b | 0.02 | b | <26 | c |
| Garage | 15 | 15 | b | 0.03 | b | <26 | <10/<20 |
| Stairs to 1st floor | 17 | 18 | North wall | 0.04 | c | <26 | c |

^aLocation is shown on Figs. 7-9.

^bNo distinct maximum found.

^cNot measured.

27

081534

000655

Table 8. Radon and radon daughter measurements at 460 Davison Avenue

| Location | Concentration of ^{222}Rn in air (pCi/L) | Radon daughter concentration in air (WL) | Concentration of radionuclides in air (pCi/L) | | | | |
|----------|---|--|---|--------------------------|--------------------------|--------------------------|--------------------------|
| | | | ^{218}Po (Ra A) | ^{214}Pb (Ra B) | ^{214}Bi (Ra C) | ^{212}Pb (Th B) | ^{212}Bi (Th C) |
| Basement | a | 0.0019 | 0.30 | 0.17 | 0.19 | 0.027 | 0.035 |

^aSample not taken.

28

08 15 3 4

0 0 0 6 5 6

Table 9. Summary of outdoor measurements and sample results at 460 Davison Avenue

| Measurement or sample type | Number of measurements/samples | Range | Mean | Biased readings ^a |
|---|--------------------------------|---------|------|------------------------------|
| <u>Grid point measurements</u> | | | | |
| External gamma exposure rate at 1 m ($\mu\text{R/h}$) | 83 | 9-410 | 48 | |
| External gamma exposure rate at the surface ($\mu\text{R/h}$) | 83 | 8-450 | 54 | |
| Beta-gamma dose rate at 1 cm above the surface (mrad/h) | 18 | 0.03-1 | 0.3 | |
| <u>Systematic surface soil samples (pCi/g)</u> | | | | |
| ²³² Th | 20 | 1.1-28 | 7.1 | |
| ²³⁸ U | 20 | 0.9-3.4 | 2.1 | |
| ²²⁶ Ra | 20 | 0.7-10 | 2.7 | |
| <u>Biased measurements^a</u> | | | | |
| Maximum external gamma-ray exposure rate at 1 m ($\mu\text{R/h}$) | | | | 450 |
| Maximum external gamma-ray exposure rate at surface ($\mu\text{R/h}$) | | | | 990 |
| Maximum concentration of ²³² Th in surface soil (pCi/g) | | | | 350 |
| Maximum concentration of ²³² Th in subsurface soil (pCi/g) | | | | 1400 |
| Average depth of contaminated soil (m) | | | | 1.0 |

^aBiased measurements included gamma-ray scanning of the entire yard, surface soil sampling at biased locations, and subsurface investigation through the use of augered holes.

7
5
6
0
0
0
0

Table 10. Summary of indoor measurements and sample results
at 460 Davison Avenue

| Measurement or sample type | Number of measurements/ samples | Range | Mean | Biased readings ^a |
|---|------------------------------------|-----------|------|------------------------------|
| <u>Systematic room surveys</u> | | | | |
| External gamma-ray exposure rate at 1 m ($\mu\text{R}/\text{h}$) | 14 | 10-34 | 16 | |
| Beta-gamma dose rate at 1 cm (mrad/h) | 14 | 0.02-0.04 | 0.02 | |
| Direct alpha activity on surface ($\text{dpm}/100 \text{ cm}^2$) | 14 | <26 | <26 | |
| <u>Biased measurements^a</u> | | | | |
| Maximum external gamma-ray exposure rate at surface ($\mu\text{R}/\text{h}$) | | | | 36 |
| Maximum beta-gamma dose rate at 1 cm (mrad/h) | | | | 0.04 |
| Maximum direct alpha activity on surface ($\text{dpm}/100 \text{ cm}^2$) | | | | <26 |
| Maximum ^{222}Rn daughter concentration in air (WL) | | | | 0.0019 |

^abiased measurements included gamma-ray scanning of each room, measurement of the beta-gamma dose rates at locations of elevated gamma levels, random measurements of direct alpha and transferable alpha and beta-gamma activity on interior surface, and measurement of indoor radon and radon daughter concentrations.

0 0 0 6 5 8

Table 11. Summary of measurements results in contaminated areas at 460 Davison Avenue

| Location ^a | Measurement type | Measurement result |
|----------------------------|---|--------------------|
| Area A (back yard) | Maximum external gamma-ray exposure rate at surface ($\mu\text{R/h}$) | 460 |
| | Range of ^{232}Th concentrations measured in surface soil (pCi/g) | 1.6-270 |
| | Maximum ^{232}Th concentration measured in subsurface soil (pCi/g) | 1400 |
| | Estimated areal extent of contamination (m^2) | 170 |
| | Estimated average depth of contamination (m) | 1.0 |
| | Estimated total volume of contaminated material ^b (m^3) | 170 |
| Area B (along driveway) | Maximum external gamma-ray exposure rate at surface ($\mu\text{R/h}$) | 990 |
| | Estimated areal extent of contamination (m^2) | 11 |
| | Estimated average depth of contamination (m) | 0.5 |
| | Estimated total volume of contaminated material ^b (m^3) | 6 |
| Area (fron. yard) | Maximum external gamma-ray exposure rate at surface ($\mu\text{R/h}$) | 350 |
| | Range of ^{232}Th concentration measured in surface soil (pCi/g) | 6.3-350 |
| | Maximum ^{232}Th concentration in subsurface soil (pCi/g) | 620 |
| | Estimated areal extent of contamination (m^2) | 18 |
| | Estimated average depth of contamination (m) | 1.0 |
| | Estimated total volume of contaminated material ^b (m^3) | 18 |

000659

Table 11. (continued)

| Location ^a | Measurement type | Measurement result |
|-----------------------------|---|--------------------|
| Area D (west property line) | Maximum external gamma-ray exposure rate at surface ($\mu\text{R/h}$) | 25 |
| | ²³² Th concentrations measured in surface soil (pCi/g) | 47 |
| | Estimated areal extent of contamination (m^2) | 3 |
| | Estimated average depth of contamination (m) | 0.15 |
| | Estimated total volume of contaminated material ^b (m^3) | 0.5 |

^aFor area designation see Fig. 10.

^bVolume estimates are based on a correlation of surface measurements and subsurface investigations using a reasonable number of drill holes. The exact shape of the contaminated regions cannot be precisely determined by this type of investigation. Actual irregular shapes have therefore been approximated by the most reasonable regular geometric shape (e.g., cylinder, or rectangular prism).

000660

33

08 1534

APPENDIX I

ACTION AND SURVEY PLAN,
MAYWOOD, NEW JERSEY

0|0|0|6|6|1

ACTION PLAN FOR PRIVATE PROPERTY SURVEYS IN MAYWOOD, NEW JERSEY

Purpose

This plan defines the ORNL activities to survey private properties in Maywood, New Jersey, which are believed to be contaminated with residues from thorium processing operations at the former Maywood Chemical Company. There are three objectives of these surveys: (1) define the current radiological status of each property, (2) define the sources of radiation exposures on each property and estimate the volume of material involved, and (3) prepare an exposure evaluation, comparing radiation exposures with guidelines.

Approach

Initially, ORNL will review all available data relevant to the properties involved. A generic survey plan will then be developed for conduct of private property surveys and will be modified in the field as needed to characterize the properties and radiation sources. Following approval of this approach, ORNL will conduct the radiological surveys at each private property for which consent can be obtained. The findings of each field survey will be prepared and submitted to DOE as a preliminary report; a final report on each property will be submitted after environmental samples are analyzed. The required work is separated into individual tasks which may be summarized as follows:

Task 1. Review of Available Data

Data provided by ESED have been reviewed and incorporated in the survey planning process. Other data have been volunteered by ORAU, and by the New Jersey Department of Environmental Protection. It is anticipated that additional contacts will be made with NRC Region I personnel. Historical information about each property will be obtained from brief home owner/occupant interviews.

0|0|0|6|6|2

Task 2. Preparation of Survey Plan

The radiological survey plan for private properties will be developed after the available data are reviewed. Ordinarily, a site visit would precede this task. However, due to the immediate need for the surveys, a general plan will be prepared based on prior experience. This plan will be modified in the field as needed to fully characterize any property.

Task 3. Implementation of Radiological Surveys

Radiological surveys of private properties will be conducted according to the approved survey plan. Surveys will only be conducted on properties for which consent can be obtained. Outdoor drilling will be done on an as-needed basis. Drilling or coring through basement floors will only be done as a last resort for obtaining necessary data about subsurface radioactivity profiles.

Task 4. Gamma-Ray Scans of Adjacent Properties

Because of the crescent shapes of the isopleths in the EG&G aerial survey and the possibility of spill-over contamination, it is recommended that gamma-ray scans be conducted on adjacent properties along Latham and Madison Streets. These scans would be conducted by survey personnel walking on the property. The ground would be scanned with an NaI(Tl) scintillation survey meter at the surface; building foundation walls would also be scanned. If any anomalies were found during this scan, a full radiological survey of the property would be conducted. A scanning survey of a property would be done only with the property owner's consent.

Task 5. Radiological Survey Reporting

The radiological survey findings for each property will be reported in two separate reports. One report will contain all field measurement data obtained at each property. These preliminary letter reports will be submitted to DOE within five days following the completion of the

000863

survey. Conclusions in these letter reports will relate the radiation exposures found on each site to established guidelines for members of the public. Sources of radiation exposures will be identified and the quantity of radioactive material involved will be estimated. An evaluation of radiation exposure will be prepared for each property. The second letter report for each property will contain all analytical results for environmental samples taken during the survey. These analytical results will be related to on-site measurements. Comments received on the preliminary report will be incorporated in preparation of the second report. Any properties for which access was denied will be identified as will any property which had no anomalies on the surface gamma-ray scan. These identifications will be made in the cover letter transmitting the first series of reports.

Schedule

Task 1 and Task 2.

These tasks will be completed during the week ending May 20, 1981.

Task 3 and Task 4.

These tasks will be performed concurrently. Task 3 is scheduled to begin June 3, 1981.

Task 5.

Preliminary reports will be transmitted during the week of June 19, 1981. Target date for transmittal is June 15, 1981. Draft final letter reports will be transmitted approximately six weeks following the preliminary report transmittal.

RADIOLOGICAL SURVEY PLAN FOR PRIVATE PROPERTIES
IN MAYWOOD, NEW JERSEY

INTRODUCTION

The Stepan Chemical Company (formerly Maywood Chemical Company) was developed in 1895. From about 1916 until 1957 the Maywood Chemical Company processed thorium for use in the manufacture of gas mantles for various lighting devices.¹ In 1932, Route 17 was built to the west of the main plant through an area that was used for disposal of process wastes. Although access to the site was probably restricted, the waste disposal area had no access restrictions. In 1959, Maywood Chemical Company was purchased by the Stepan Chemical Company. A federally supervised cleanup of a portion of the waste dump was conducted in 1960. Presently, Stepan Chemical Company owns a 30-acre site east of N.J. Route 17, just south of the New York, Susquehanna and Western Railroad right of way. On the west side of N.J. Route 17, SWS Industries owns a vacant 8.7-acre site (formerly a portion of the waste disposal area); plans have been made to locate a warehouse/office complex on this site.

During an aerial survey of the Stepan Chemical Company and the surrounding area in Maywood, New Jersey, by EG&G¹ on January 26, 1981, anomously high gamma-ray exposure rates (principally ²³²Th daughter radionuclides) were observed in a residential area close to the Stepan Chemical site. Seven private homes in Maywood, New Jersey, were later identified in a follow-up ground survey by the Nuclear Regulatory Commission² as having external gamma radiation levels significantly above background. Exposure rates up to 3 mR/h have been observed on these properties. It is surmized that thorium residues were obtained from the Maywood Chemical Waste disposal area and used as fill material on these private properties.

At the request of the Environmental and Safety Engineering Division (ESED) of the Department of Energy, the Off-Site Pollutant Measurements Group, at Oak Ridge National Laboratory (ORNL) will perform a comprehensive radiological survey on seven private properties in Maywood, New Jersey. The survey is scheduled to begin June 3, 1981.

5
6
8
0
0
0

SURVEY METHODS

The following section describes the survey methods to be employed in performing the ORNL radiological survey. Detailed descriptions of instrumentation, measurement procedures and sample analyses are presented in an ORNL/TM report.³

Outdoor Survey

Grid system

Prior to radiological measurements, a rectangular grid will be established covering the entire area to be surveyed. The spacing of mutually perpendicular grid lines will be determined by the size of the area involved and by the level of detail required for any given area. At least 30 grid points (intersection of grid lines) will be established for each property. At some locations where significant levels of contamination are observed, a smaller grid system will be superimposed to provide more detailed information as required. The size of the smaller grid system will be determined in the field as conditions dictate.

External gamma radiation measurements

External gamma radiation levels will be measured using a 3.2 cm x 3.8 cm NaI(Tl) probe attached to a ratemeter (calibration for this instrument is performed in the field using a Reuter-Stokes Pressurized Ion Chamber [PIC]). External gamma-ray exposure rates are measured at the ground surface and 1 m above the ground surface at grid points; these measurements will be recorded. Each grid block (square formed by the grid lines) will be scanned at the surface, and the maximum gamma radiation level within each block will be noted.

Beta-gamma dose rates

Beta-gamma dose rate measurements at 1 cm above the ground surface will be performed at those locations where surface gamma radiation levels are significantly above background. The instrument used for

these measurements is a Geiger-Mueller (G-M) survey meter with a window thickness of 7 mg/cm² and a halogen-quenched GM tube (open and closed window).

Surface deposits of radioactive materials

Samples of surface soil (a 10 cm × 10 cm area soil sample to a 15-cm depth) will be collected at systematic locations and analyzed in order to identify the locations and estimated quantities of surface deposits of radioactivity. In addition, biased surface soil samples will be obtained at representative locations where elevated external gamma radiation levels are observed. Soil samples will be packaged and transported back to ORNL for processing and analyses for concentrations of ²³⁸U, ²²⁶Ra, ²³²Th and other radionuclides as appropriate.

Subsurface deposits of radioactive materials

Drillings and/or corings will be made at selected locations throughout any area suspected of having subsurface deposits of contaminated materials. The purpose of drilling and/or coring is to locate and estimate the quantities of subsurface deposits of radioactivity. If subsurface radioactivity is suspected within an area and no surface contamination is evident, a random search technique of drilling and gamma ray logging within that area will be used to locate and identify the boundaries of any subsurface contamination. Drill holes will be augered to an approximate 15-cm diameter and to a depth where a naturally occurring soil strata is encountered. A plastic pipe with a 10-cm (4-inch) inside diameter will be placed in each hole, and an NaI(Tl) gamma-ray scintillation probe will be lowered inside the pipe. The probe is encased in a lead shield with a narrow collimating slot on the side. This arrangement provides measurement of gamma radiation intensities resulting from contamination within small fractions of the hole depth. Measurements are usually made at 15-cm or 30-cm intervals. This "logging" of the core holes is done in order to define the profile of radioactivity underground and as a first step in determining the extent of subsurface contamination at each location. Samples of

7
9
0
6
0
0
0

subsurface soil from core holes will be collected at random locations and returned to ORNL for analysis for ^{226}Ra , ^{238}U , ^{232}Th and other radionuclides deemed appropriate. The number of locations of core holes will be determined in the field based on the results of auger-hole loggings and surface gamma radiation levels. The core holes will be drilled and split-spoon samples will be taken at 15- to 30-cm intervals as required. After sampling, the core holes will be augered to a 15-cm diameter and logged at 15- to 30-cm intervals (as required) using the lead-shielded gamma-ray scintillator.

Indoor Surveys

External gamma radiation measurements

External gamma radiation levels will be measured at a height of 1 m above the floor in the center of each room using an NaI(Tl) scintillation survey meter. The survey meter will be cross-calibrated with the Reuter-Stokes PIC in the most frequently occupied room of the house. The floor and walls of each room will be scanned for gamma radiation at the surface and the maximum gamma radiation level associated with each surface will be noted.

Beta-gamma dose rates

Beta-gamma dose rates will be measured at those locations where external gamma-ray exposure rates were found to be significantly above background. These measurements will consist of open- and closed-window Geiger-Mueller (G-M) survey meter readings.

Surface alpha radiation levels

Surface alpha radiation levels will be measured at the center of the room as well as several other locations as determined in the field. A ZnS(Ag) detector (covered by a 0.03-mil aluminized mylar sheet) will be used and have an attached photomultiplier tube with a portable scaler/ratemeter.

8
9
0
0
0

Removable alpha and beta-gamma activity from surfaces

Removable or transferable surface contamination levels will be measured by taking standard smears. The smears are lightly rubbed over a 100-cm² area and counted for removable long-lived alpha and beta-gamma activity. A smear sample will be obtained near the center of the room where a hard surface is accessible. Smear samples will also be taken at locations where elevated gamma, beta-gamma, and/or alpha radiation levels are observed.

Radon and radon progeny measurements

Concentration of radon (²²²Rn) will be measured indoors at the houses if evidence of indoor contamination is found. Individual radon (radon [²²²Rn], thoron [²²⁰Rn], actinon [²¹⁹Rn]) progeny concentrations in air will be measured at various locations and times within all houses.

Other samples

During the gamma-ray scanning of the property, building materials such as wood, concrete, or bricks may be found to have elevated gamma radiation levels associated with them. These materials as well as atypical samples from the outdoor survey (e.g., large rocks, vegetation, etc.) may be obtained and returned to ORNL for analyses. The resulting laboratory analysis is sample-specific, dependent on the pattern of contamination (i.e., radionuclide concentration versus measurement of surface contamination).

9
6
6
0
0
0

REFERENCES

1. EG&G, An Aerial Radiological Survey of the Stepan Chemical Company and Surrounding Area, Maywood, New Jersey, EG&G Survey Report NRC-8109 (April 1981).
2. Nuclear Regulatory Commission, memorandum from M. Campbell to J. D. Kinnerman, re: Records of Surveys of Private Homes in Maywood, New Jersey, Docket No. 40-8610, May 15, 1981.
3. B. A. Berven, T. E. Myrick, R. W. Leggett, W. A. Goldsmith, and F. F. Haywood, Generic Radiological Survey and Post Remedial Action Survey Plan for Private and Public Properties Associated with the Department of Energy's Remedial Action Program, ORNL/TM-7850 (in draft).

000670

08 1534

43

APPENDIX II

GAMMA PROFILE GRAPHS OF CORE HOLES AT
460 DAVISON AVENUE IN MAYWOOD, NEW JERSEY

1
2
3
4
5
6
7
8
9
0
0
0
6
7
1

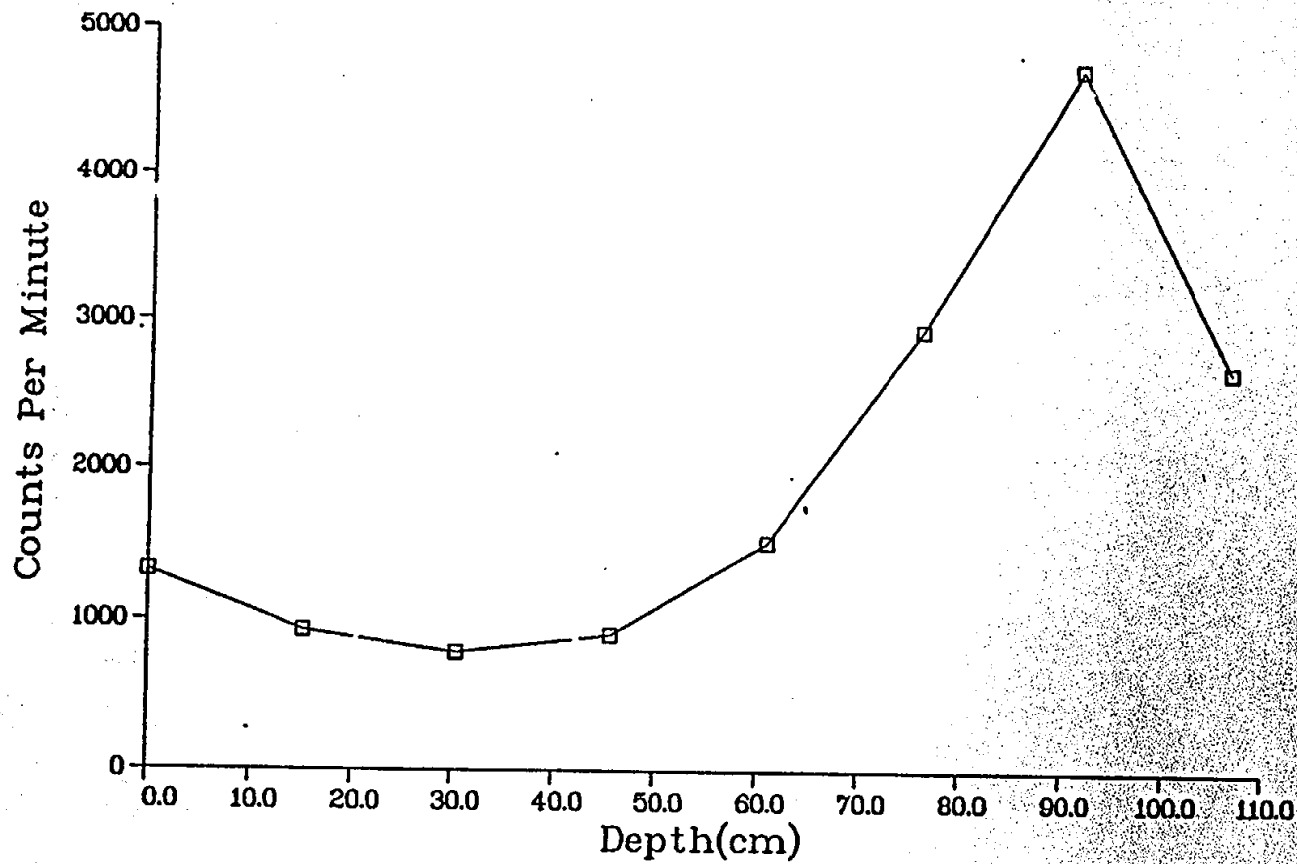


Fig. II-1, Gamma profile of core hole MJC34 (see Fig. 6)

44

081534

0 0 0 6 7 2

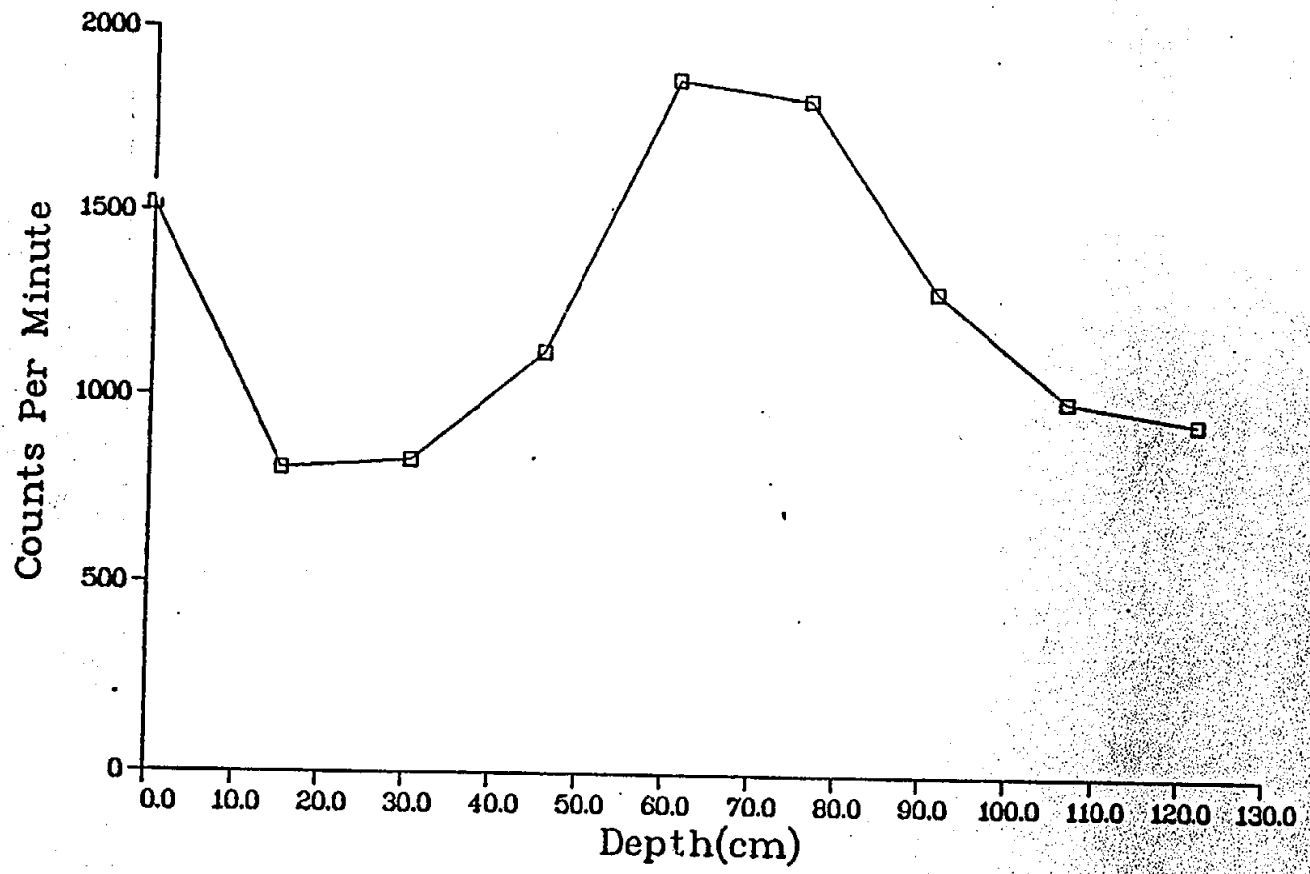


Fig. II-2. Gamma profile of core hole MJC35 (see Fig. 6)

45

081534

000673

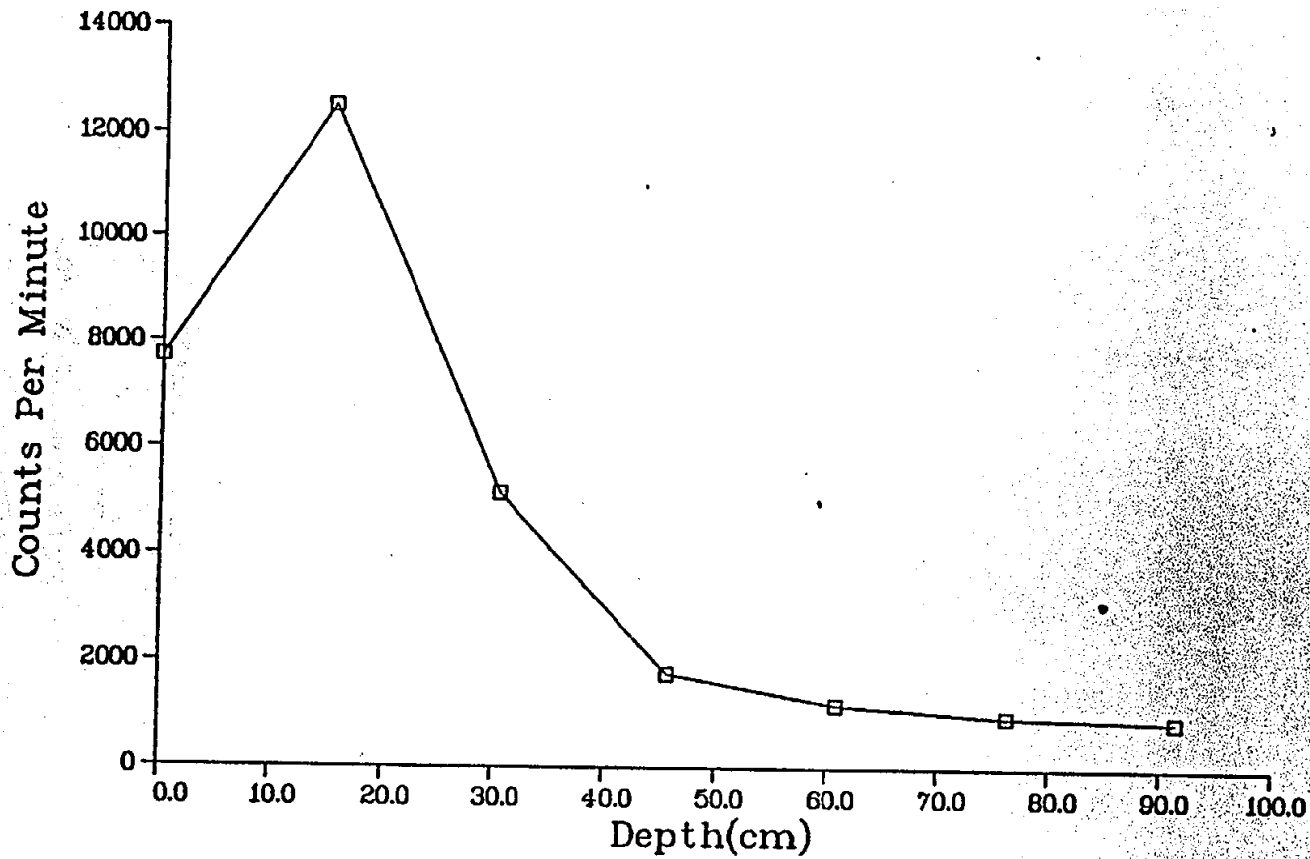


Fig. II-3. Gamma profile of core hole MJC36 (see Fig. 6)

46

081534

000'674

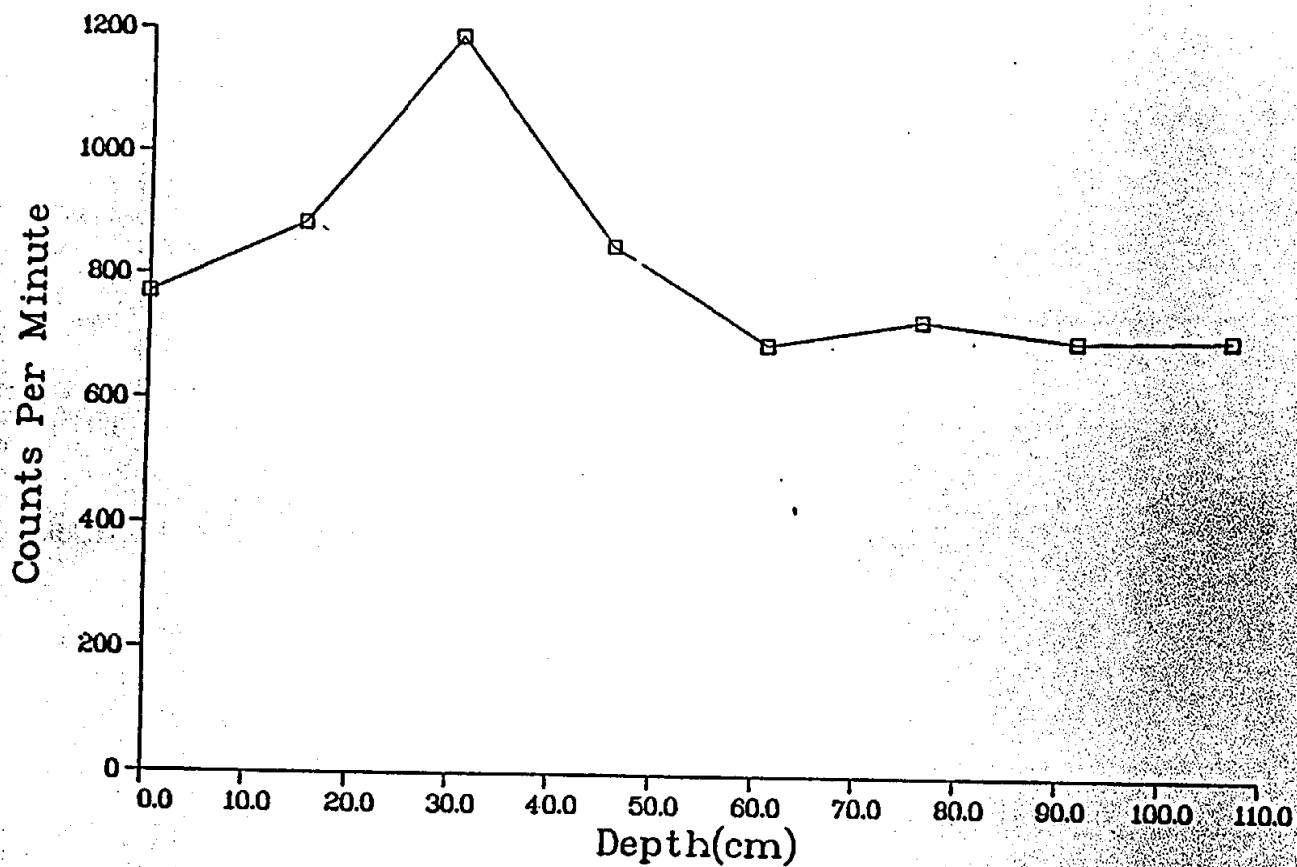


Fig. II-4. Gamma profile of core hole MJC37 (see Fig. 6)

47
081534

000675

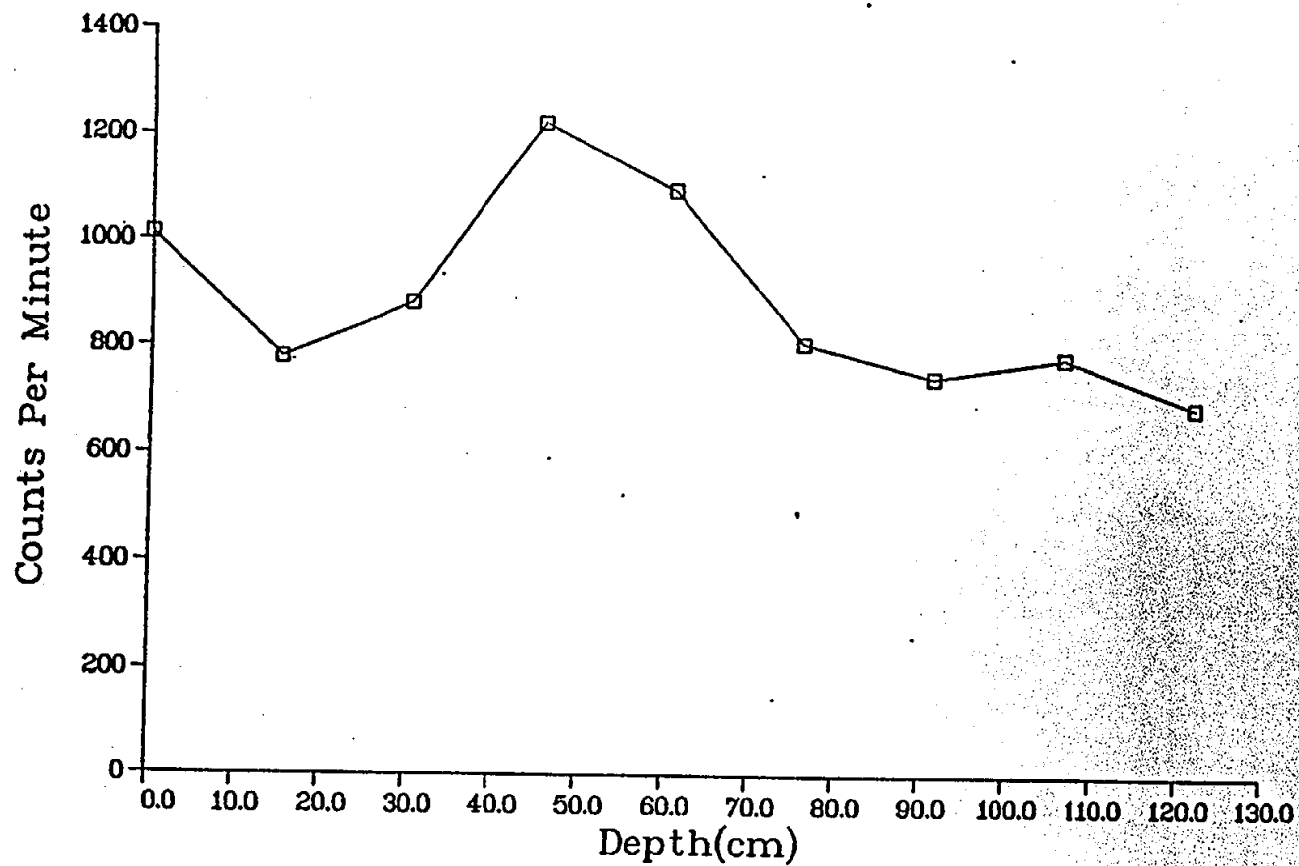


Fig. II-5. Gamma profile of core hole MJC38 (see Fig. 6)

48

08 1534

0 0 0 6 7 6

EVALUATION OF RADIATION EXPOSURES AT 460 DAVISON AVENUE
IN MAYWOOD, NEW JERSEY

INTRODUCTION

Contaminated material was first discovered at this property and several nearby properties during an EG&G aerial radiological survey and subsequent ground-level Nuclear Regulatory Commission radiological survey. Because the contaminated material was similar to waste material that was generated by the Maywood Chemical Company (now Stepan Chemical Company), the material is believed to have originated from that source.

John Tripuka, owner of 460 Davison Avenue, confirmed that from 1944-1946, material from the former Maywood Chemical Company was transported to 464 Davison (then a vacant lot) by his father and was used for fill and mulching material at both properties. Other neighbors also had access to this material for use in their yards.

In June 1981, on request of the Department of Energy (DOE), Oak Ridge National Laboratory (ORNL) performed a radiological survey of this property. It was determined that much of the exterior property was contaminated with radioactive material of the naturally occurring thorium and uranium decay chains. The contamination is limited to approximately the upper 3 feet (1 meter) of soil. The contaminated material is found in the following locations: (1) most of the vegetated area of the back yard with the exception of the area in the center rear of the back yard; (2) the lawn and shrubbery area in the east side of the front yard (excluding the strip of lawn adjacent to the street); and (3) along the length of the west property line (within the top 45-cm of the ground surface). No radioactive contamination was found in the house.

BACKGROUND RADIATION EXPOSURES

The naturally occurring radionuclides present at this property are present normally in minute quantities throughout our environment. Concentrations of these radionuclides in normal soils, air, water, food, etc., are referred to as background concentrations. Radiation exposures resulting from this environmental radioactivity are referred to as background exposures. These background exposures are not caused by any human

9
7
6
0
0
0
0

activity and, to a large extent, can be controlled only through man's moving to areas with lower background exposures. Each and every human receives some background exposure daily.

The use of radioactive materials for scientific, industrial, or medical purposes may cause radiation exposures above the background level to be received by workers in the industry and, to a lesser extent, by members of the general public. Scientifically based guidelines have been developed to place an upper limit on these additional exposures. Limits established for exposures to the general public are much lower than limits established for workers in the nuclear industry.

As described previously, the contaminated materials present on this property consisted of radionuclides of the thorium and the uranium decay chains. Uranium-238 and thorium-232 were created when the earth was formed, and are still present today because they take a very long time to undergo radioactive decay. The half-life is a measure of the time required for radioactive decay; for uranium-238 it is 4.5 billion years. Thus, if 4.5 billion years ago you had a curie* of uranium-238, today you would have one-half curie; 4.5 billion years hence, this would only be one-fourth curie. As the uranium-238 decays, it changes into another substance, thorium-234. Thorium-234 is called the "daughter" of uranium-238. In turn, thorium-234 is the "parent" of protactinium-234. Radioactive decay started by uranium-238 continues as shown in Table III-1 until stable lead is formed. The "decay product" listed in Table III-1 is the radiation produced as the parent decays. Radioactive decay started by thorium-232 continues as shown in Table III-2 until stable lead is also formed.

RADIATION EXPOSURES AT 460 DAVISON AVENUE

There are four primary pathways to humans from the type of contaminated material found on this property. These potential pathways are: (1) direct gamma-ray exposures, (2) inhalation of radon and

*The curie is a unit used to measure the amount of radioactivity in a substance; one curie represents 37 billion radioactive disintegrations per second.

00080

radon daughters from radon decay, (3) inhalation of airborne radioactive particles, and (4) ingestion of radioactively contaminated foods or water. In the following sections, the magnitude of each of these pathways at 461 Latham Street is described, based on the radiological conditions determined from the recent radiation survey. A summary of this radiation exposure data is given in Table III-3 along with a listing of the normal background levels for this area and the applicable guideline values for comparison.

Direct Gamma-Ray Exposures

As shown in Tables III-1 and III-2, several of the daughters of uranium-238 and of thorium-232 emit gamma radiation (gamma-rays are penetrating radiation like X-rays). Hence, the contamination present on this property is a source of external gamma radiation exposure to persons who reside near or come in contact with this material. Measurements of the gamma radiation levels outdoors on the property determined that the exposure rate at 1 m above the ground ranged from 9 to 410 microroentgens* per hour, with an average of 48 microroentgens per hour. Inside the house, the exposure rates ranged from 6 to 34 microroentgens per hour, with an average value of 16 microroentgens per hour. For comparison, the normal background gamma-ray exposure rate for the Maywood area is 8 microroentgens per hour.

The NRC guidelines (found in the Code of Federal Regulations, Title 10, Part 20[†]) require that the continuous gamma radiation exposure to any individual in the general population not exceed 500 milliroentgens per year. For persons residing at this property, continuous exposure (24 hours a day, 365 days per year) to the average levels found outdoors would result in an annual gamma-ray exposure of 420 milliroentgens, a

*The roentgen is a unit which was defined for radiation protection purposes for people exposed to penetrating gamma radiation. A micro-roentgen is one-millionth of a roentgen. A milliroentgen is one-thousandth of a roentgen, or one thousand microroentgens.

[†]Title 10, Code of Federal Regulations, Part 20, is a regulatory document published by the Nuclear Regulatory Commission and may be found in the Federal Register.

1
8
0
0
0
8
1

value below the guideline limit. Exposures above the guideline could occur only at isolated areas outdoors on the property, and only under continuous exposure conditions. Indoors, the continuous annual exposure from the average radiation levels would be 140 milliroentgens. Again, this exposure is below the applicable guideline. For comparison with everyday exposures, these values can be compared to a normal background exposure of 70 milliroentgens per year in New Jersey or a typical chest X-ray exposure of 27 milliroentgens.

Inhalation of Radon and Radon Daughters

Radon-222 (the daughter of radium-226) and radon-220 (the daughter of radium-224) are inert gases produced by decay of their respective parent radionuclides. When produced, this gas can migrate through the soil or other materials and eventually be released to the atmosphere. If the gas enters a structure with poor ventilation, accumulation of the gas and its short-lived daughters in room air can occur. Breathing of this short-lived radon daughter results in exposure of the respiratory tract to radiation.

Since contaminated soil containing the radioactive parents of radon-222 and radon-220 was found outdoors on this property, the potential for radon migration into the house was believed to exist. Measurements of indoor concentrations of radon and its daughters in air were made for comparison with normal background levels, as well as current guidelines.

The measured radon daughter concentrations in the house were determined to be less than 0.002 working level.* These concentrations are below the normal background range for the New Jersey area (0.004 to 0.008 working level), and are well below the guideline values of 0.03

* The working level is a unit which was defined for radiation protection purposes for uranium miners. It represents a specific level of energy emitted by the short-lived daughters of radon.

0000882

working level suggested in 10 CFR 20 or 0.01 working level given in the Surgeon General's Guidelines.*

Inhalation of Airborne Radioactive Particles

Radioactive particles associated with soil or similar materials can become airborne due to natural (e.g., wind) or human (scrapping) forces. Once airborne, these particles can become inhaled, with subsequent exposure of the respiratory tract. Guidelines for acceptable concentrations of radionuclides in air have been developed and are presented in 10 CFR 20. At 460 Davison, this exposure pathway is of no concern due to the location of the contaminated material under grass and other vegetation. However, if present land use changes and extensive handling or scraping of the contaminated material occurs, the potential for radiation exposure from this pathway would be increased.

Ingestion of Radioactivity

The final pathway of potential radiation exposure for residents at this property is the ingestion of radionuclides through contaminated foods or water. Since the water supply at this residence is the public water system, unaffected by the contamination on the property, ingestion of contaminated water is considered insignificant.

magnitude of the radiation exposure to an individual ingesting foods grown in contaminated soil is dependent upon a number of factors, including: (1) the concentration of radionuclides in the soil, (2) the amount of uptake of the specific radionuclide by the plant of concern, and (3) the amount of the plant consumed by the individual. At the present time, no guidelines are available listing the acceptable concentrations of radionuclides in the soil or foods for the radionuclides of concern at this property. On this property, under present land use conditions, consumption of produce from a small garden could produce long-term radiation exposures, but these exposures would be small compared to

*Federal Register, Vol. 41, No. 253, pages 56777-56778, December 30, 1976 (10 CFR 712).

3
8
8
0
0
0

direct gamma-ray exposure pathway. If land use changes (e.g., to large scale food production), the potential for long-term radiation exposures to individuals ingesting significant quantities of food grown in the contaminated soil would require careful evaluation.

PRELIMINARY ESTIMATE OF RADIATION RISK

For purposes of radiation protection, all radiation exposures are assumed to be capable of increasing an individual's risk of contracting cancer. A precise numerical value cannot be assigned with any certainty to a given individual's increase in risk attributable to radiation exposure. The reasons for this are numerous; they include the individual's age at onset of exposure, variability in latency period (time between exposure and physical evidence of disease), the individual's personal habits and state of health, previous or concurrent exposure to other cancer-causing agents, and the individual's family medical history. Because of these variables, large uncertainties exist in any estimates of the number of increased cancer deaths in the relatively small population exposed at this property.

Using the results of the radiological survey at this property, preliminary estimates of the increased risk of cancer for residents living there have been calculated.* These estimates considered only the two significant exposure pathways (direct radiation exposure and inhalation of radon and radon daughters) and were based on the following assumptions:

1. The measurements that are reported in Table III-3 are representative of the conditions throughout the year and for every year. It is recognized that radon and radon-daughter levels in the homes could be higher in winter because of less ventilation.

*J. W. Healy and W. J. Bair, "Preliminary Report - Radiological Appraisal of Houses in Maywood, N. J." Attachment to letter from W. J. Bair, Battelle Pacific Northwest Laboratories to W. E. Mott, Department of Energy, Washington, D. C., July 17, 1981.

000684

2. The inhabitants spend 5% of their time in the basement (or the radon escaping to the upstairs when the door is opened adds an equivalent exposure).
3. The inhabitants live in this house all of their lives, from birth to age 70.
4. Each day the inhabitants spend an average of two hours away from the house and property, four hours outside the house but on the property, and 18 hours inside the house.

The total estimated increased risk due to radiation induced cancer for residents at 460 Davison Avenue was calculated to be 0.07%.^{*} Thus, for persons living for a lifetime at 460 Davison, instead of an average chance of 24.4% of eventually dying from cancer (the average for Bergen County, New Jersey in 1975)[†], they might have a hypothetical average chance of 24.47% of dying from cancer. These values compare with a lifetime average chance of dying from cancer of 21.8% for the state of New Jersey, and 19.3% for the United States.

SUMMARY

A summary of radiation exposure data at 460 Davison Avenue is presented in Table III-3. Of the four primary radiation exposure pathways, only one may be of immediate concern at this site under present conditions of property use. Radon daughters are within background levels, therefore, no significant exposure above background from this pathway is anticipated. Inhalation of radionuclides is considered a negligible source of radiation exposure at the present since there is no apparent

^{*}J. W. Healy and J. J. Bair, "Preliminary Report - Radiological Appraisal of Houses in Maywood, N. J." Attachment to letter from W. J. Bair, Battelle Pacific Northwest Laboratories, to W. E. Mott, Department of Energy, Washington, D. C., July 17, 1981.

[†]Mortality statistics were obtained from data in Vital Statistics of the United States - 1975, Volume II - Mortality, Part B, U. S. Department of Health, Education and Welfare, Public Health Service, National Center for Health Statistics, (PHS) 78-1102, 1977.

ordinary mechanism to cause contaminated material in the soil to become airborne. It is believed that possible future use of portions of the property for growing food could contribute appreciable radiation exposure to an individual consuming this food as a large fraction of his diet; however, under current conditions of use, this pathway is of no concern. Exposures to gamma radiation outdoors on this property could approach the guidelines for exposure to individuals in the general public. This pathway is, therefore, the most significant exposure mechanism at this site under current conditions of property use.

6
8
9
0
0
0

Table III-1. Uranium-238 decay series

| Parent | Half-life | Decay products | Daughter |
|---------------------------|---------------------------|----------------|------------------|
| Uranium-238 | 4.5 billion years | alpha | thorium-234 |
| Thorium-234 | 24 days | beta, gamma | protactinium-234 |
| Protactinium-234 | 1.2 minutes | beta, gamma | uranium-234 |
| Uranium-234 | 250 thousand years | alpha | thorium-230 |
| Thorium-230 | 80 thousand years | alpha | radium-226 |
| Radium-226 | 1,600 years | alpha | radon-222 |
| Radon-222 | 3.8 days | alpha | polonium-218 |
| Polonium-218 ^a | 3 minutes | alpha | lead-214 |
| Lead-214 ^a | 27 minutes | beta, gamma | bismuth-214 |
| Bismuth-214 ^a | 20 minutes | beta, gamma | polonium-214 |
| Polonium-214 ^a | $\frac{2}{10,000}$ second | alpha | lead-210 |
| Lead-210 | 22 years | beta | bismuth-210 |
| Bismuth | 5 days | beta | polonium-210 |
| Polonium-210 | 140 days | alpha | lead-206 |
| Lead-206 | stable | none | none |

^aShort-lived radon daughters.

7
8
9
0
0
0
0

Table III-2. Thorium-232 decay series

| Parent | Half-life | Decay products | Daughter |
|--------------|------------------------------|-----------------------|--|
| Thorium-232 | 14 billion years | alpha | radium-228 |
| Radium-228 | 6.7 years | beta | actinium-228 |
| Actinium-228 | 6.1 hours | beta, gamma | thorium-228 |
| Thorium-228 | 1.9 years | alpha, gamma | radium-224 |
| Radium-224 | 3.6 days | alpha, gamma | radon-220 |
| Radon-220 | 55 seconds | alpha, gamma | polonium-216 |
| Polonium-216 | 0.15 seconds | alpha | lead-212 |
| Lead-212 | 11 hours | beta, gamma | bismuth-212 |
| Bismuth-212 | 61 minutes | alpha, beta, gamma | polonium-212 (64%) or thallium-208 (36%) |
| Polonium-212 | 0.3 millionth of a second | alpha | lead-208 |
| or | $\frac{3}{1,000,000}$ | | |
| Thallium-208 | 3.1 minutes | beta, gamma | lead-208 |
| Lead-208 | stable | none | none |

88800088

Table III-3. Summary of exposure data at 460 Davison Avenue in Maywood, New Jersey

| Exposure pathway ^{a,b} | New Jersey background levels | Guideline value for individual in the general public | Average levels found on property |
|---------------------------------|--|--|---|
| Gamma radiation | Outdoors: 8 microRoentgens per hour at one meter | Outdoors: 60 microRoentgens per hour | Outdoors: 48 microRoentgens per hour at one meter |
| | Indoors: 8 microRoentgens per hour at one meter | Indoors: 60 microRoentgens per hour | Indoors: 16 microRoentgens per hour at one meter |
| Radon daughters in indoor air | Basement: 0.008 working level | Basement: 0.01 working level | Basement: 0.0019 working level |
| | Upstairs: 0.004 working level | Upstairs: 0.01 working level | |

^aInhalation of radionuclides pathway is not an appreciable source of radiation exposure to individuals living at this property.

^bIngestion of vegetables grown in contaminated soil could only be a significant pathway of radiation exposure to individuals living at this property if vegetables grown in contaminated soil constitute a large fraction of their diet.

60

081534

0 0 0 8 8 9