

050540 - D3

ORNL/RASA-88/15

m-048



**OAK RIDGE
NATIONAL
LABORATORY**

MARTIN MARIETTA

**RESULTS OF THE
RADIOLOGICAL SURVEY
AT
100 HANCOCK STREET (LJ058),
LODI, NEW JERSEY**

R. D. Foley
R. F. Carrier
L. M. Floyd
J. W. Crutcher

ATED BY
MARTIN MARIETTA ENERGY SYSTEMS, INC.
FOR THE UNITED STATES
DEPARTMENT OF ENERGY

060640

Printed in the United States of America. Available from
National Technical Information Service
U.S. Department of Commerce
5285 Port Royal Road, Springfield, Virginia 22161
NTIS price codes—Printed Copy: A03; Microfiche A01

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

HEALTH AND SAFETY RESEARCH DIVISION

**Nuclear and Chemical Waste Programs
(Activity No. AH 10 05 00 0; ONLWCO1)**

**RESULTS OF THE RADIOLOGICAL
SURVEY AT 100 HANCOCK STREET (LJ058),
LODI, NEW JERSEY**

R. D. Foley, R. F. Carrier, L. M. Floyd, and J. W. Crutcher

Date of Issue - March 1989

Investigation Team

**R. E. Swaja - Measurement Applications and Development Manager
W. D. Cottrell - FUSRAP Project Director
R. D. Foley - Field Survey Supervisor**

Survey Team Members

**A. C. Butler
W. H. Shinpaugh*
J. K. Williams**

***Stone Associates**

**Work performed by the
MEASUREMENT APPLICATIONS AND DEVELOPMENT GROUP**

**Prepared by the
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831-6285
operated by
MARTIN MARIETTA ENERGY SYSTEMS, INC.
for the
U. S. DEPARTMENT OF ENERGY
under Contract No. DE-AC05-84OR21400**

CONTENTS

LIST OF FIGURES	v
LIST OF TABLES	vii
ACKNOWLEDGMENTS	ix
INTRODUCTION	1
SURVEY METHODS	2
SURVEY RESULTS	2
Auger Hole Soil Samples and Gamma Logging	3
SIGNIFICANCE OF FINDINGS	3
REFERENCES	4

LIST OF FIGURES

- 1 Diagram showing locations of soil samples taken at 100 Hancock Street,
Lodi, New Jersey (LJ058) 5
- 2 Gamma profile of auger hole 1 (LJ058A1) at 100 Hancock Street, Lodi,
New Jersey 6
- 3 Gamma profile of auger hole 2 (LJ058A2) at 100 Hancock Street, Lodi,
New Jersey 7

LIST OF TABLES

1	Applicable guidelines for protection against radiation	8
2	Background radiation levels for the northern New Jersey area	8
3	Concentrations of radionuclides in soil at 100 Hancock Street, Lodi, New Jersey (LJ058)	9

ACKNOWLEDGMENTS

Research for this project was sponsored by the Division of Facility and Site Decommissioning Projects, U.S. Department of Energy, under Contract No. DE-AC05-84OR21400 with Martin Marietta Energy Systems, Inc. The authors wish to acknowledge the support of J. E. Baublitz, Deputy Director, Office of Remedial Action and Waste Technology; J. J. Fiore, Director, Division of Facility and Site Decommissioning Projects; and members of their staff. The authors also appreciate the contributions of B. C. Littleton and L. J. Jeffers of IR&A Publications Office, B. S. Ellis, D. A. Roberts, and T. R. Stewart of the Measurement Applications and Development group, and W. H. Shinpaugh of Don Stone Associates for participation in the collection, analyses, and reporting of data for this survey.

**RESULTS OF THE RADIOLOGICAL
SURVEY AT 100 HANCOCK STREET (LJ058),
LODI, NEW JERSEY***

INTRODUCTION

From 1916 to 1956, process wastes and residues associated with the production and refining of thorium and thorium compounds from monazite ores were generated by the Maywood Chemical Works (MCW), Maywood, New Jersey. During the latter part of this period, MCW supplied rare earth metals and thorium compounds to various government agencies. In the 1940s and 1950s, MCW produced thorium and lithium, under contract, for the Atomic Energy Commission (AEC). These activities ceased in 1956, and approximately three years later, the 30-acre real estate was purchased by the Stepan Company. The property is located at 100 Hunter Avenue in a highly developed area in Maywood and Rochelle Park, Bergen County, New Jersey.

During the early years of operation, MCW stored wastes and residues in low-lying areas west of the processing facilities. In the early 1930s, these areas were separated from the rest of the property by the construction of New Jersey State Highway 17. The Stepan property, the interim storage facility, and several vicinity properties have been designated for remedial action by the Department of Energy (DOE).

The waste produced by the thorium extraction process was a sandlike material containing residual amounts of thorium and its decay products, with smaller quantities of uranium and its decay products. During the years 1928 and 1944 to 1946, area residents used these process wastes mixed with tea and cocoa leaves as mulch in their lawns and gardens. In addition, some of the contaminated wastes were apparently eroded from the site into Lodi Brook and carried downstream.

Lodi Brook is a small stream flowing south from Maywood with its headwaters near the Stepan waste storage site. Approximately 150 ft after passing under State Route 17, the stream has been diverted underground through concrete or steel culverts until it merges with the Saddle River in Lodi, New Jersey. Only a small section near Interstate 80 remains uncovered. From the 1940s to the 1970s when the stream was being diverted underground, its course was altered several times. Some of these changes resulted in the movement of contaminated soil to the surface of a few properties, where it is still in evidence. In other instances, the contaminated soil was covered over or mixed with clean fill, leaving no immediate evidence on the surface. Therefore, properties in question may be drilled in search of former stream bed material, even in the absence of surface contamination.

As a result of the Energy and Water Appropriations Act of Fiscal Year 1984, the property discussed in this report and properties in its vicinity contaminated

*The survey was performed by members of the Measurement Applications and Development group of the Health and Safety Research Division at Oak Ridge National Laboratory under DOE contract DE-AC05-84OR21400.

with residues from the former MCW, were included as a decontamination research and development project under the DOE Formerly Utilized Sites Remedial Action Program. As part of this project, DOE is conducting radiological surveys in the vicinity of the site to identify properties contaminated with residues derived from the MCW. The principal radionuclide of concern is thorium-232. The radiological survey discussed in this report is part of that effort and was conducted, at the request of DOE, by members of the Measurement Applications and Development group of the Oak Ridge National Laboratory.

A radiological survey of the commercial property at 100 Hancock Street, Lodi, New Jersey, was conducted on September 18, 1986.

SURVEY METHODS

The radiological survey of the property included collection of subsurface soil samples and gamma logging of auger holes. Because logging results clearly indicated the presence of contamination in excess of the applicable guideline (subsequently verified by soil sample analysis), the customary surface scanning of the entire property for gamma exposure rates was not conducted. No indoor survey measurements were performed.

To define the extent of possible subsurface soil contamination, auger holes were drilled to depths of approximately 1.8 m. A plastic pipe was placed in each hole, and a NaI scintillation probe was lowered inside the pipe. The probe was encased in a lead shield with a horizontal row of collimating slits on the side. This collimation allows measurement of gamma radiation intensities resulting from contamination within small fractions of the hole depth. Measurements were made at 30- and 35-cm intervals. If the gamma readings in the hole were elevated, a soil sample was scraped from the wall of the auger hole at the point showing the highest gamma radiation level. The auger hole loggings were used to select locations where further soil sampling would be useful. A split-spoon sampler was used to collect subsurface samples at known depths. In some auger holes, a combination of split-spoon sampling and side-wall scraping was used to collect samples. These survey methods followed the plan outlined in Reference 1. A comprehensive description of the survey methods and instrumentation has been presented in another report.²

SURVEY RESULTS

Applicable federal guidelines are summarized in Table 1.³ The normal background radiation levels for the northern New Jersey area are presented in Table 2. These data are provided for comparison with survey results presented in this section. All direct measurement results presented in this report are gross readings; background radiation levels have not been subtracted. Similarly, background concentrations have not been subtracted from radionuclide concentrations measured in environmental samples.

Auger Hole Soil Samples and Gamma Logging

Various thicknesses of subsurface soil were sampled from depths of 0 to 185 cm in auger holes (A) drilled at two separate locations indicated in Fig. 1. The results of analyses of these samples (LJ058A1A-LJ058A2E) are given in Table 3. Concentrations of ^{226}Ra and ^{232}Th in soil samples from the auger holes ranged from 0.70 to 5.4 and 1.0 to 29 pCi/g, respectively. The concentration of ^{232}Th in sample LJ058A2D (29 pCi/g) is above the DOE criterion for subsurface soil (Table 1). The elevated concentration was found at a depth of 120 to 150 cm.

Gamma logging was performed in each of the two auger holes to characterize and further define the extent of possible contamination. The logging technique used here is not radionuclide specific. However, logging data, in conjunction with soil analyses data, may be used to estimate regions of elevated radionuclide concentrations in auger holes when compared with background levels for the area. Following a comparison of these data, it appears that any shielded scintillator readings of 1,000 counts per minute (cpm) or greater generally indicate the presence of elevated concentrations of ^{226}Ra and/or ^{232}Th . Data from the gamma profiles of the logged auger holes are graphically represented in Figs. 2 and 3. Readings at depths between the surface and 2.6 m were greater than 1,000 cpm in auger hole 1, with a maximum reading of 4,000 cpm at 1.2 m. Readings in auger hole 2 were elevated from the surface to a depth of 1.8 m, with a maximum of 6,600 cpm at 1.4 m.

SIGNIFICANCE OF FINDINGS

Measurements taken at 100 Hancock Street indicate that the property contained radioactive contamination primarily from the ^{232}Th decay chain, with some contamination from ^{226}Ra . These radionuclide distributions are typical of the type of material originating from the processing operations at MCW. The concentration and extent of ^{232}Th on this property is in excess of the applicable DOE criterion (Table 1). This material was found as shown in Fig. 1 at the location of sample A2. Based on the results of this radiological assessment, it is recommended that this site be considered for inclusion in the DOE remedial action program.

REFERENCES

1. W. D. Cottrell, ORNL, to A. J. Whitman, DOE/HQ, correspondence, "Radiological Survey of Private Properties in Lodi, New Jersey" (August 15, 1984).
2. T. E. Myrick, B. A. Berven, W. D. Cottrell, W. A. Goldsmith, and F. F. Haywood, *Procedures Manual for the ORNL Radiological Survey Activities (RASA) Program*, Oak Ridge National Laboratory, ORNL/TM-8600 (April 1987).
3. U.S. Department of Energy, *Guidelines for Residual Radioactivity at Formerly Utilized Sites, Remedial Action Program and Remote Surplus Facilities Management Program Sites* (Rev. 2, March 1987).
4. T. E. Myrick and B. A. Berven, *State Background Radiation Levels: Results of Measurements Taken During 1975-1979*, Oak Ridge National Laboratory, ORNL/TM-7343 (November 1981).

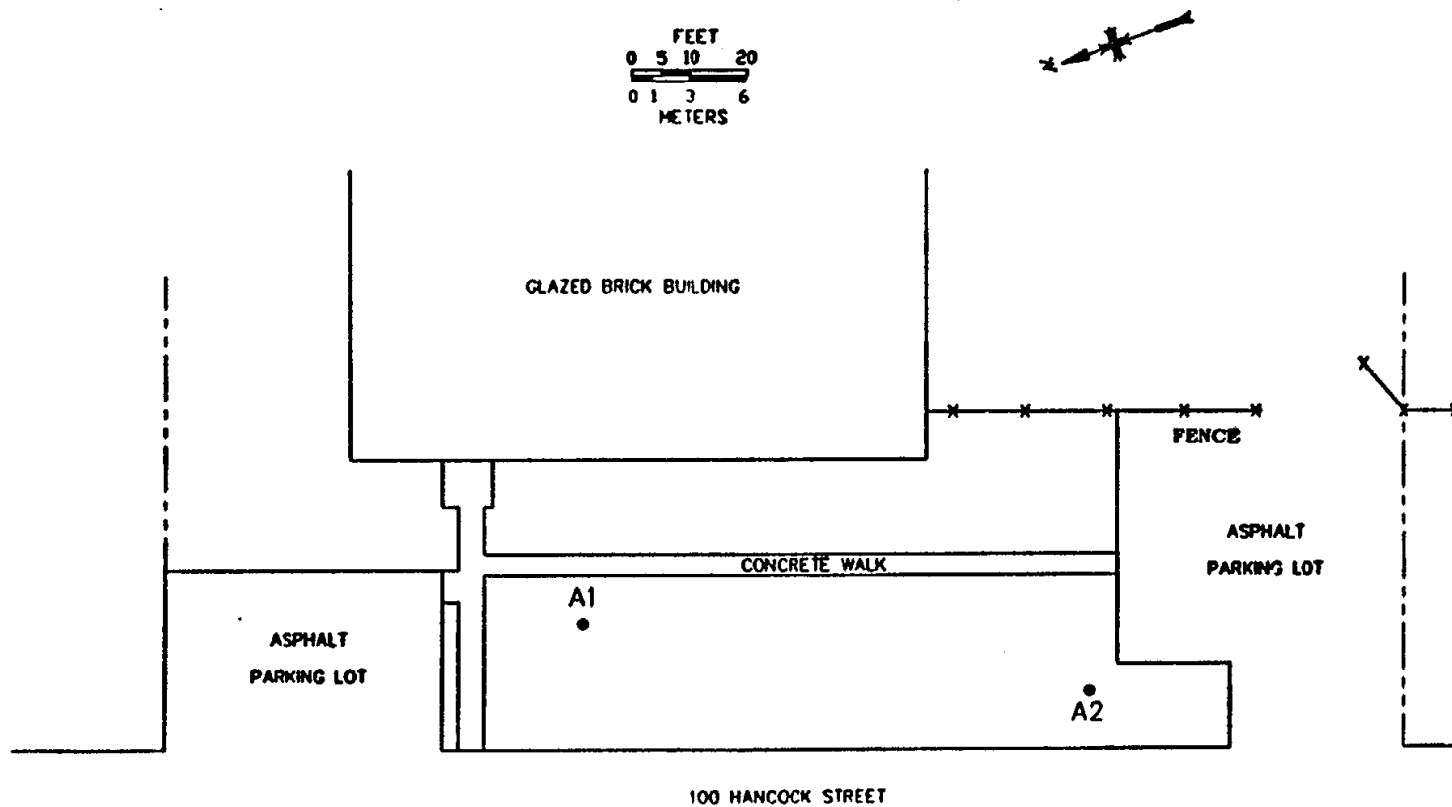


Fig. 1. Diagram showing locations of soil samples at 100 Hancock Street, Lodi, New Jersey (LJ058).

049090

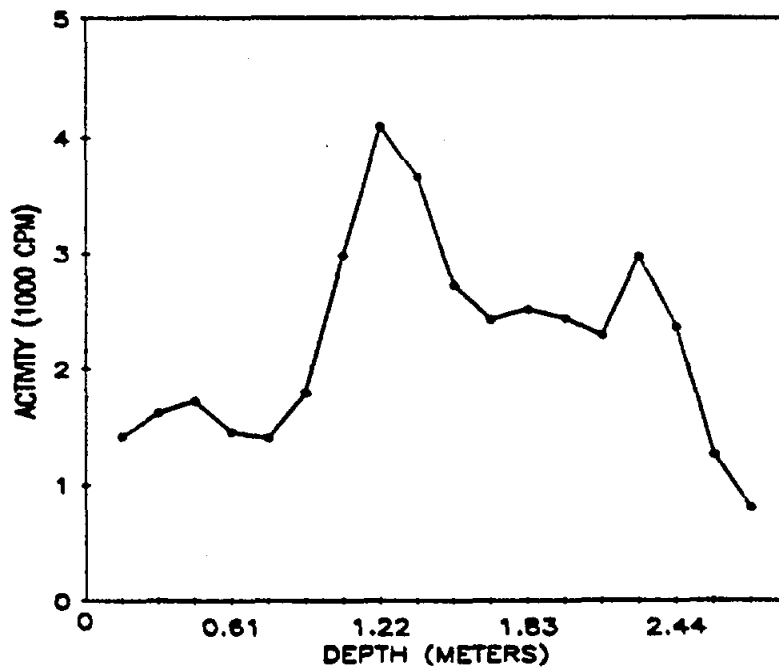


Fig. 2. Gamma profile for auger hole 1 (LJ058A1) at 100 Hancock Street, Lodi, New Jersey.

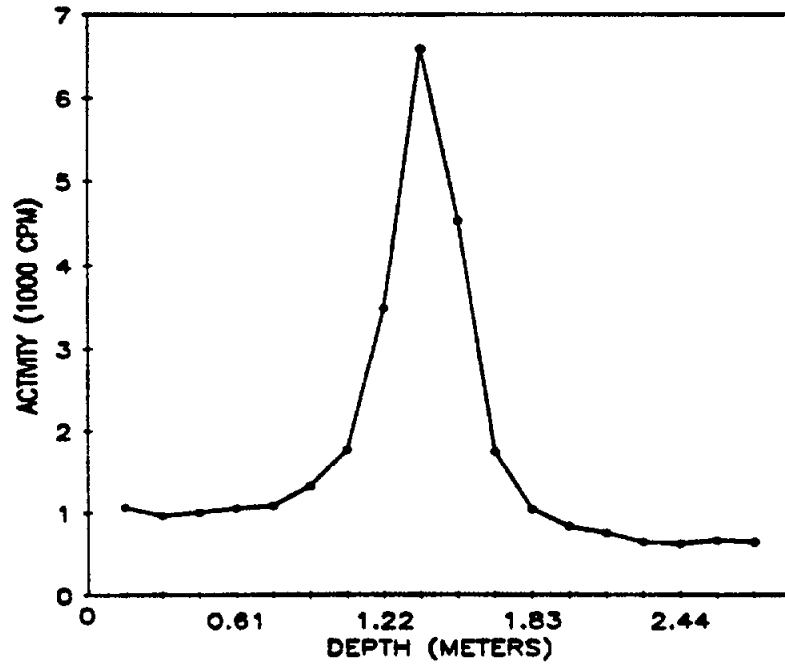


Fig. 3. Gamma profile for auger hole 2 (LJ058A2) at 100 Hancock Street, Lodi, New Jersey.

Table 1. Applicable guidelines for protection against radiation*

Mode of exposure	Exposure conditions	Guideline value
Radionuclide concentrations in soil	Maximum permissible concentration of the following radionuclides in soil above background levels averaged over 100 m ² area ²³² Th ²³⁰ Th ²²⁸ Ra ²²⁶ Ra	5 pCi/g averaged over the first 15 cm of soil below the surface; 15 pCi/g when averaged over 15-cm thick soil layers more than 15 cm below the surface

*Reference 3.

Table 2. Background radiation levels for the northern New Jersey area

Type of radiation measurement or sample	Radiation level or radionuclide concentration
Concentration of radionuclides in soil (pCi/g)	
²³² Th	0.9 ^a
²³⁸ U	0.9 ^a
²²⁶ Ra	0.9 ^a

*Reference 4.

**Table 3. Concentrations of radionuclides in soil at
100 Hancock Street, Lodi, New Jersey (LJ058)**

Sample ^a	Depth (cm)	Radionuclide concentration (pCi/g)	
		²²⁶ Ra ^b	²³² Th ^b
<i>Auger samples^c</i>			
A1A	0-30	1.1 ± 0.07	2.5 ± 0.1
A1B	30-60	1.3 ± 0.1	4.2 ± 0.5
A1C	60-90	1.0 ± 0.06	2.0 ± 0.1
A1D	90-120	2.6 ± 0.1	5.4 ± 0.2
A1E	120-150	2.9 ± 0.2	7.8 ± 0.8
A2A	30-60	0.70 ± 0.2	1.1 ± 0.2
A2B	60-90	0.73 ± 0.07	1.0 ± 0.4
A2C	90-120	1.1 ± 0.1	3.4 ± 0.09
A2D	120-150	5.4 ± 0.3	29 ± 1.2
A2E	150-185	2.4 ± 0.2	6.5 ± 0.4

^aLocations of soil samples are shown on Fig. 2.

^bIndicated counting error is at the 95% confidence level ($\pm 2\sigma$).

^cAuger samples are taken from holes drilled to further define the depth and extent of radioactive material. Holes are drilled where the surface may or may not be contaminated.

INTERNAL DISTRIBUTION

- | | |
|--------------------|------------------------------|
| 1. B. A. Berven | 13. S. V. Kaye |
| 2. R. F. Carrier | 14. P. T. Owen |
| 3. W. D. Cottrell | 15-17. R. E. Swaja |
| 4. A. G. Croff | 18. J. K. Williams |
| 5. J. W. Crutcher | 19. IR&A Publications Office |
| 6. J. T. Ensminger | 20. Laboratory Records - RC |
| 7-11. R. D. Foley | 21. Central Research Library |
| 12. L. M. Floyd | 22. Y-12 Technical Library |

EXTERNAL DISTRIBUTION

23. J. D. Berger, Oak Ridge Associated Universities, P. O. Box 117, Oak Ridge, TN 37831
24. R. W. Doane, Eberline, Inc., 800 Oak Ridge Turnpike, Oak Ridge, TN 37831
25. J. J. Fiore, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 26-28. P. J. Gross, U.S. Department of Energy, P. O. Box E, Oak Ridge, TN 37831
- 29-31. G. K. Hovey, Bechtel National, Inc., 800 Oak Ridge Turnpike, Oak Ridge, TN 37831
32. L. R. Levis, Roy F. Weston, Inc., 20030 Century Blvd., Germantown, MD 20874
33. G. P. Turi, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
34. J. W. Wagoner, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
- 35-37. Andrew Wallo III, U.S. Department of Energy, 19901 Germantown Road, Germantown, MD 20874
38. Office of Assistant Manager, Energy Research and Development, Oak Ridge Operations Office, Oak Ridge, TN 37831
- 39-40. Office of Scientific and Technical Information, DOE, Oak Ridge, TN 37831